

DuPont™ Delrin® 911DP NC010

ACETAL RESIN

Product Information

Common features of Delrin® acetal resins include mechanical and physical properties such as high mechanical strength and rigidity, excellent fatigue and impact resistance, as well as resistance to moisture, gasoline, lubricants, solvents, and many other neutral chemicals. Delrin® acetal resins also have excellent dimensional stability and good electrical insulating characteristics. They are naturally resilient, self-lubricating, and available in a variety of colors and speciality grades.

Delrin® acetal resin typically is used in demanding applications in the automotive, domestic appliances, sports, industrial engineering, electronics, and consumer goods industries.

Delrin® 911DP is a low viscosity acetal homopolymer with enhanced crystallization for faster cycle times and excellent creep and fatigue resistance. It has improved thermal stability, excellent dimensional stability, low warpage and fewer voids.

General information	Value	Unit	Test Standard	
Resin Identification	POM	-	ISO 1043	
Part Marking Code	POM	-	ISO 11469	
Rheological properties	Value	Unit	Test Standard	
Melt volume-flow rate	21	cm ³ /10min	ISO 1133	
Temperature	190	°C	ISO 1133	
Load	2.16	kg	ISO 1133	
Melt mass-flow rate	24	g/10min	ISO 1133	
Melt mass-flow rate, Temperature	190	°C	ISO 1133	
Melt mass-flow rate, Load	2.16	kg	ISO 1133	
Molding shrinkage, parallel	1.9	%	ISO 294-4, 2577	
Molding shrinkage, normal	1.8	%	ISO 294-4, 2577	
Mechanical properties	Value	Unit	Test Standard	
Tensile Modulus	3400	MPa	ISO 527-1/-2	
Yield stress	75	MPa	ISO 527-1/-2	
Yield strain	10	%	ISO 527-1/-2	
Nominal strain at break	20	%	ISO 527-1/-2	
Flexural Modulus	3300	MPa	ISO 178	
Flexural Stress at 3.5%	90	MPa	ISO 178	
Charpy impact strength			ISO 179/1eU	
73°F	160	kJ/m ²		
-22°F	150	kJ/m ²		
Charpy notched impact strength			ISO 179/1eA	
73°F	6.5	kJ/m ²		
-22°F	6	kJ/m ²		
Ball indentation hardness, H 961/30	175	MPa	ISO 2039-1	DS
DS: Derived from similar grade				
Thermal properties	Value	Unit	Test Standard	
Melting temperature, 18°F/min	178	°C	ISO 11357-1/-3	
Temp. of deflection under load			ISO 75-1/-2	
260 psi	108	°C		
65 psi	163	°C		
Coeff. of linear therm. expansion, parallel	100	E-6/K	ISO 11359-1/-2	
Coeff. of linear therm. expansion, normal	100	E-6/K	ISO 11359-1/-2	
RTI, electrical			UL 746B	
30mil	50	°C		
60mil	110	°C		
120mil	110	°C		
RTI, impact			UL 746B	
30mil	50	°C		
60mil	85	°C		
120mil	90	°C		

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com



DuPont™ Delrin® 911DP NC010

ACETAL RESIN

				UL 746B
RTI, strength				
30mil	50	°C		
60mil	90	°C		
120mil	95	°C		
Flammability		Value	Unit	Test Standard
Burning Behav. at 60mil nom. thickn.	HB	class		IEC 60695-11-10
Thickness tested	1.5	mm		IEC 60695-11-10
UL recognition	yes	-		UL 94
Burning Behav. at thickness h	HB	class		IEC 60695-11-10
Thickness tested	0.8	mm		IEC 60695-11-10
UL recognition	yes	-		UL 94
FMVSS Class	B	-		ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	25	mm/min		ISO 3795 (FMVSS 302)
Other properties		Value	Unit	Test Standard
Humidity absorption, 80mil	0.2	%		Sim. to ISO 62
Water absorption, 80mil	0.9	%		Sim. to ISO 62
Density	1420	kg/m ³		ISO 1183
VDA Properties		Value	Unit	Test Standard
Emissions	<8	mg/kg		VDA 275
Fogging, F-value (refraction)	97	%		ISO 6452
Fogging, G-value (condensate)	0.1	mg		ISO 6452
Injection		Value	Unit	Test Standard
Drying Recommended	yes	-		-
Drying Temperature	≥80	°C		-
Drying Time, Dehumidified Dryer	2 - 4	h		-
Processing Moisture Content	≤0.2	%		-
Melt Temperature Optimum	215	°C		-
Min. melt temperature	210	°C		-
Max. melt temperature	220	°C		-
Mold Temperature Optimum	90	°C		-
Min. mold temperature	80	°C		-
Max. mold temperature	100	°C		-
Hold pressure range	80 - 100	MPa		-
Hold pressure time	7.5	s/mm		-
Annealing time, optional	30	min/mm		-
Annealing temperature	160	°C		-
Extrusion		Value	Unit	Test Standard
Drying Temperature	75 - 85	°C		-
Drying Time, Dehumidified Dryer	2 - 4	h		-
Processing Moisture Content	≤0.2	%		-
Melt Temperature Optimum	200	°C		-
Melt Temperature Range	195 - 205	°C		-

Characteristics

Processing	<ul style="list-style-type: none"> Injection Molding Profile Extrusion 	<ul style="list-style-type: none"> Sheet Extrusion Other Extrusion
Delivery form	<ul style="list-style-type: none"> Pellets 	
Additives	<ul style="list-style-type: none"> Lubricants 	<ul style="list-style-type: none"> Release agent
Regional Availability	<ul style="list-style-type: none"> North America Europe 	<ul style="list-style-type: none"> Asia Pacific South and Central America Near East/Africa Global

Processing Texts

Injection molding

Drying is recommended, but not necessary for newly opened packaging stored in a dry location.

Follow the drying guidelines above in the following cases:

Revised: 2018-01-09

Page: 2 of 4

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Delrin® 911DP NC010

ACETAL RESIN

- If moisture is above the Processing Moisture Content recommendation,
- When a resin container is damaged,
- When the material is not properly stored in a dry place at room temperature, or
- When packaging stays open for a significant time.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa




DuPont™ Delrin® 911DP NC010

ACETAL RESIN

Diagrams

Stress-strain

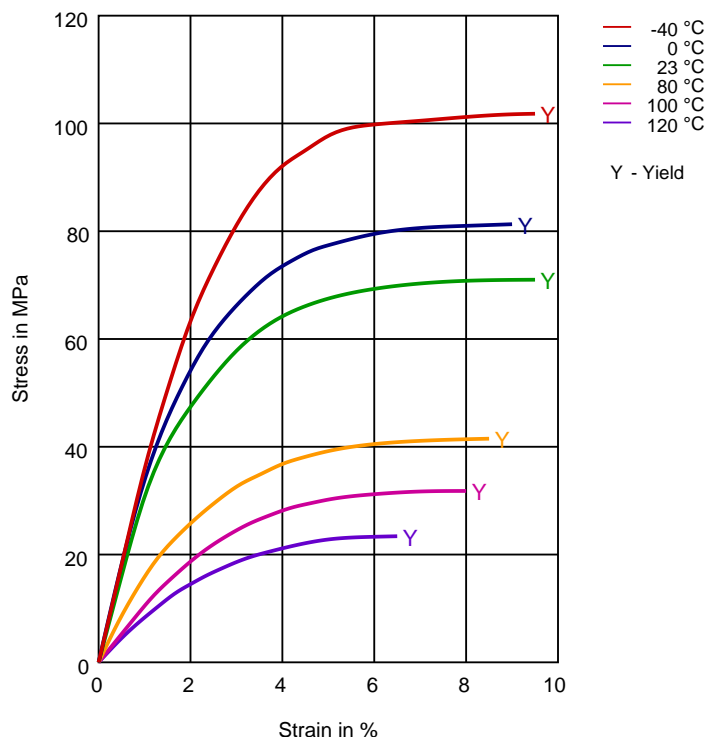

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 160 mil (Hytrel® measured at 80 mil), IEC Electrical properties measured at 80 mil, all ASTM properties measured at 120 mil, and test temperatures are 73°F unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

