

DuPont™ Delrin® SC699 NC010 (Preliminary Data)

ACETAL RESIN

Product Information

Common features of Delrin® acetal resins include mechanical and physical properties such as high mechanical strength and rigidity, excellent fatigue and impact resistance, as well as resistance to moisture, gasoline, lubricants, solvents, and many other neutral chemicals. Delrin® acetal resins also have excellent dimensional stability and good electrical insulating characteristics. They are naturally resilient, self-lubricating, and available in a variety of colors and speciality grades.

Delrin® acetal resin typically is used in demanding applications in the automotive, domestic appliances, sports, industrial engineering, electronics, and consumer goods industries.

Delrin® SC699 is a lubricated low viscosity acetal homopolymer, developed for thin-walled parts requiring low wear and low friction and high precision moulding in the healthcare industry.

SPECIAL CONTROL for HEALTHCARE APPLICATIONS

This product is manufactured according to Good Manufacturing Practice (GMP) principles and generally accepted in food contact applications in Europe and the USA when meeting applicable use conditions. This product is also tested against ISO 10993-5 and -11 and selected parts of USP Class VI. For details, individual compliance statements are available from your DuPont representative.

General information	Value	Unit	Test Standard
Resin Identification	POM	-	ISO 1043
Part Marking Code	POM	-	ISO 11469
Rheological properties	Value	Unit	Test Standard
Melt volume-flow rate	21	cm ³ /10min	ISO 1133
Temperature	190	°C	ISO 1133
Load	2.16	kg	ISO 1133
Melt mass-flow rate	25	g/10min	ISO 1133
Molding shrinkage, parallel	1.9	%	ISO 294-4, 2577
Molding shrinkage, normal	1.8	%	ISO 294-4, 2577
Mechanical properties	Value	Unit	Test Standard
Tensile Modulus	3100	MPa	ISO 527-1/-2
Yield stress	63	MPa	ISO 527-1/-2
Yield strain	15	%	ISO 527-1/-2
Nominal strain at break	30	%	ISO 527-1/-2
Flexural Modulus	3050	MPa	ISO 178
Flexural Stress at 3.5%	82	MPa	ISO 178
Charpy impact strength			ISO 179/1eU
73°F	160	kJ/m ²	
-22°F	175	kJ/m ²	
Charpy notched impact strength			ISO 179/1eA
73°F	6.5	kJ/m ²	
-22°F	7.5	kJ/m ²	
Hardness, Rockwell, M-scale	91	-	ISO 2039-2
Hardness, Rockwell, R-scale	119	-	ISO 2039-2
Coefficient of sliding friction, 1h against itself	0.1	-	ASTM 1894
Thermal properties	Value	Unit	Test Standard
Melting temperature, 18°F/min	178	°C	ISO 11357-1/-3
Temp. of deflection under load			ISO 75-1/-2
260 psi	100	°C	
65 psi	160	°C	
Coeff. of linear therm. expansion, parallel	100	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	105	E-6/K	ISO 11359-1/-2
Flammability	Value	Unit	Test Standard
Burning rate, Thickness 1 mm	28	mm/min	ISO 3795 (FMVSS 302)
Other properties	Value	Unit	Test Standard
Humidity absorption, 80mil	0.24	%	Sim. to ISO 62
Water absorption, 80mil	1	%	Sim. to ISO 62
Density	1400	kg/m ³	ISO 1183

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com



DuPont™ Delrin® SC699 NC010 (Preliminary Data)

ACETAL RESIN

Injection	Value	Unit	Test Standard
Drying Recommended	yes	-	-
Drying Temperature	≥80	°C	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.05	%	-
Melt Temperature Optimum	215	°C	-
Min. melt temperature	210	°C	-
Max. melt temperature	220	°C	-
Mold Temperature Optimum	90	°C	-
Min. mold temperature	80	°C	-
Max. mold temperature	100	°C	-
Hold pressure range	80 - 100	MPa	-
Hold pressure time	8	s/mm	-
Annealing time, optional	30	min/mm	-
Annealing temperature	160	°C	-

Characteristics

Processing	• Injection Molding
Delivery form	• Pellets
Additives	• Lubricants • Release agent

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa




DuPont™ Delrin® SC699 NC010 (Preliminary Data)

ACETAL RESIN

Diagrams

Stress-strain

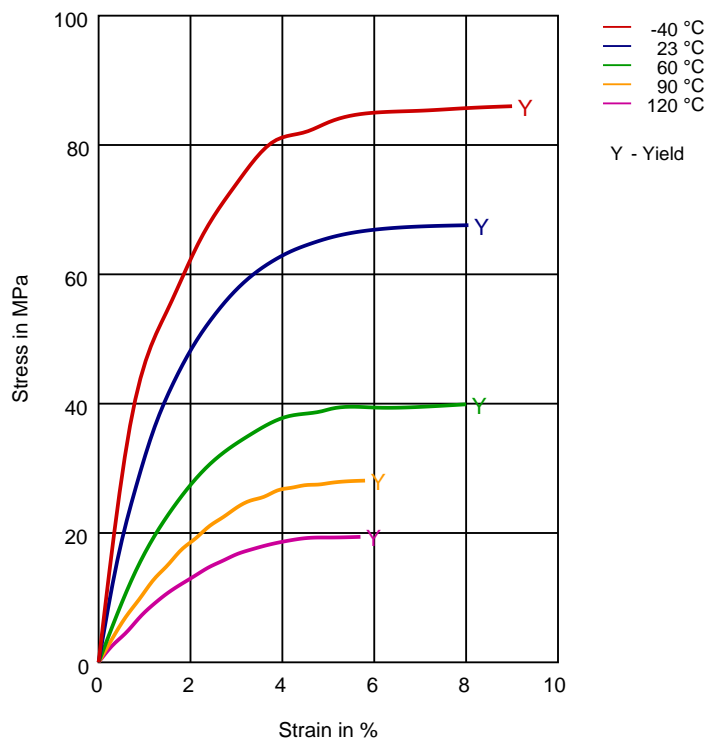

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Delrin® SC699 NC010 (Preliminary Data)

ACETAL RESIN

Secant modulus-strain

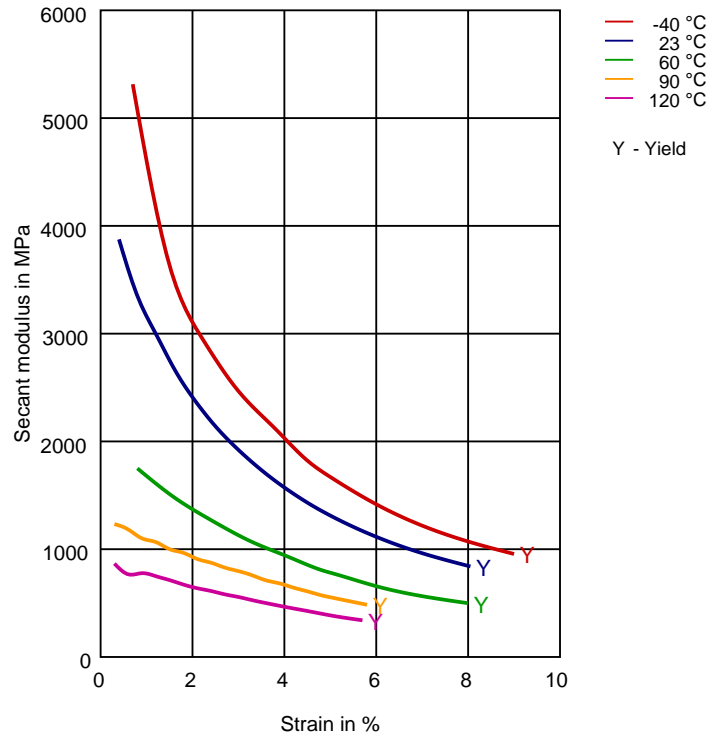

The above data are preliminary and are subject to change as additional data are developed on subsequent lots.

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 160 mil (Hytrel® measured at 80 mil), IEC Electrical properties measured at 80 mil, all ASTM properties measured at 120 mil, and test temperatures are 73°F unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

