

DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

Product Information

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, DuPont recommends, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry.

Zytel® 70G30HSLR NC010 is a 30% glass fiber reinforced, heat stabilized, hydrolysis resistant polyamide 66 resin for injection molding.

General information	Value	Unit	Test Standard
Resin Identification	PA66-GF30	-	ISO 1043
Part Marking Code	PA66-GF30	-	ISO 11469
Rheological properties	dry / cond	Unit	Test Standard
Molding shrinkage, parallel	0.3 / -	%	ISO 294-4, 2577
Molding shrinkage, normal	1.1 / -	%	ISO 294-4, 2577
Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	10000 / 7000	MPa	ISO 527-1/-2
Stress at break	200 / 130	MPa	ISO 527-1/-2
Strain at break	3.3 / 5	%	ISO 527-1/-2
Flexural Modulus	9000 / 6300	MPa	ISO 178
Flexural Strength	280 / 200	MPa	ISO 178
Tensile creep modulus			ISO 899-1
1h	* / 6800	MPa	
1000h	* / 5100	MPa	
Charpy impact strength			ISO 179/1eU
73°F	80 / 90	kJ/m ²	
-22°F	70 / 70	kJ/m ²	
Charpy notched impact strength			ISO 179/1eA
73°F	13 / 15	kJ/m ²	
-22°F	10 / 10	kJ/m ²	
Izod notched impact strength			ISO 180/1A
73°F	12 / 14	kJ/m ²	
-22°F	12 / 10	kJ/m ²	
Ball indentation hardness, H 961/30	270 / 185	MPa	ISO 2039-1 DS
Hardness, Rockwell, M-scale	104 / 88	-	ISO 2039-2
Coefficient of static friction, against steel	- / 0.25	-	ASTM 1894
Coefficient of sliding friction, 1h against steel	- / 0.31	-	ASTM 1894
DS: Derived from similar grade			
Thermal properties	dry / cond	Unit	Test Standard
Melting temperature, 18°F/min	262 / *	°C	ISO 11357-1/-3
Glass transition temperature, 18°F/min	80 / 20	°C	ISO 11357-1/-2
Temp. of deflection under load			ISO 75-1/-2
260 psi	253 / *	°C	
65 psi	261 / *	°C	
Vicat softening temperature, 90°F/h, 11 lbf	250 / *	°C	ISO 306
Coeff. of linear therm. expansion, parallel	26 / *	E-6/K	ISO 11359-1/-2

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com



DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

Coeff. of linear therm. expansion			ISO 11359-1/-2
normal	80 / *	E-6/K	
Normal, -40-23°C	70 / *	E-6/K	
Normal, 55-160°C	130 / *	E-6/K	
Parallel, -40-23°C	26 / *	E-6/K	
Parallel, 55-160°C	13 / *	E-6/K	
Thermal conductivity of melt	0.21	W/(m K)	-
Spec. heat capacity of melt	2290	J/(kg K)	-
Eff. thermal diffusivity	1.1E-7	m ² /s	-
RTI, electrical			UL 746B
30mil	140 / *	°C	
60mil	140 / *	°C	
120mil	140	°C	
RTI, impact			UL 746B
30mil	125	°C	
60mil	125 / *	°C	
120mil	125	°C	
RTI, strength			UL 746B
30mil	140	°C	
60mil	140 / *	°C	
120mil	140	°C	
Flammability	dry / cond	Unit	Test Standard
Burning Behav. at 60mil nom. thickn.	HB / *	class	IEC 60695-11-10
Thickness tested	1.5 / *	mm	IEC 60695-11-10
UL recognition	yes / *	-	UL 94
Burning Behav. at thickness h	HB / *	class	IEC 60695-11-10
Thickness tested	0.75 / *	mm	IEC 60695-11-10
UL recognition	yes / *	-	UL 94
Oxygen index	24 / *	%	ISO 4589-1/-2
Glow Wire Ignition Temperature			IEC 60695-2-13
40mil	675 / -	°C	
80mil	675 / -	°C	
Glow Wire Temperature, No Flame			IEC 60335-1
40mil	650 / -	°C	
80mil	650 / -	°C	
FMVSS Class	SE/B	-	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	24	mm/min	ISO 3795 (FMVSS 302)
Electrical properties	dry / cond	Unit	Test Standard
Relative permittivity			IEC 62631-2-1
100Hz	4.3 / 11	-	
1MHz	4.1 / 4.6	-	
Dissipation factor			IEC 62631-2-1
100Hz	70 / 4600	E-4	
1MHz	150 / 650	E-4	
Volume resistivity	>1E13 / 1E9	Ohm*m	IEC 62631-3-1
Surface resistivity	* / 1E13	Ohm	IEC 62631-3-2
Electric strength	38 / 32	kV/mm	IEC 60243-1
Comparative tracking index			
Comparative tracking index	450 / -	-	IEC 60112
3.0mm	1 / -	PLC	UL 746A
Other properties	dry / cond	Unit	Test Standard
Humidity absorption, 80mil	1.9 / *	%	Sim. to ISO 62
Water absorption, 80mil	6 / *	%	Sim. to ISO 62
Density	1370 / -	kg/m ³	ISO 1183
Density of melt	1200	kg/m ³	-

Revised: 2018-08-09

Page: 2 of 21

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

VDA Properties	dry / cond	Unit	Test Standard
Emission of organic compounds	3.2	µgC/g	VDA 277
Thermal desorption analysis of organic emissions	5	µg/g	VDA 278
Odor test	4.5	class	VDA 270
Fogging, F-value (refraction)	95 / *	%	ISO 6452
Fogging, G-value (condensate)	0.3 / *	mg	ISO 6452
Injection	dry / cond	Unit	Test Standard
Drying Recommended	yes	-	-
Drying Temperature	≥80	°C	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.2	%	-
Melt Temperature Optimum	295	°C	-
Min. melt temperature	285	°C	-
Max. melt temperature	305	°C	-
Max. screw tangential speed	0.2 / *	m/s	-
Mold Temperature Optimum	100	°C	-
Min. mold temperature	70	°C	-
Max. mold temperature	120	°C	-
Hold pressure range	50 - 100	MPa	-
Hold pressure time	3	s/mm	-
Ejection temperature	210	°C	-

Characteristics			
Processing	• Injection Molding		
Delivery form	• Pellets		
Additives	• Lubricants	• Release agent	
Special characteristics	• Heat stabilized or stable to heat		
Regional Availability	• North America • Europe	• Asia Pacific • South and Central America	• Near East/Africa • Global

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com




DuPont™ Zytel® 70G30HSLR NC010


NYLON RESIN

Diagrams

Viscosity-shear rate (measured on Zytel® 70G30HSLR BK099)

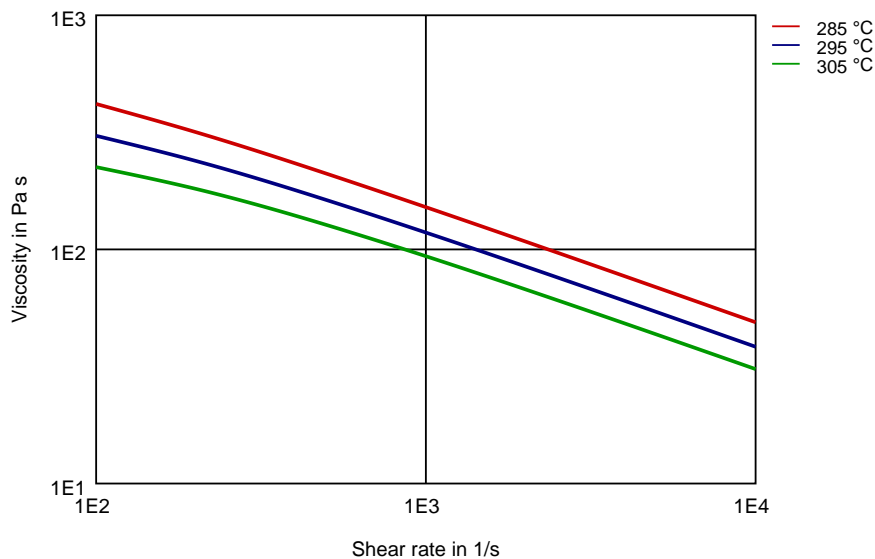

Shearstress-shear rate (measured on Zytel® 70G30HSLR BK099)

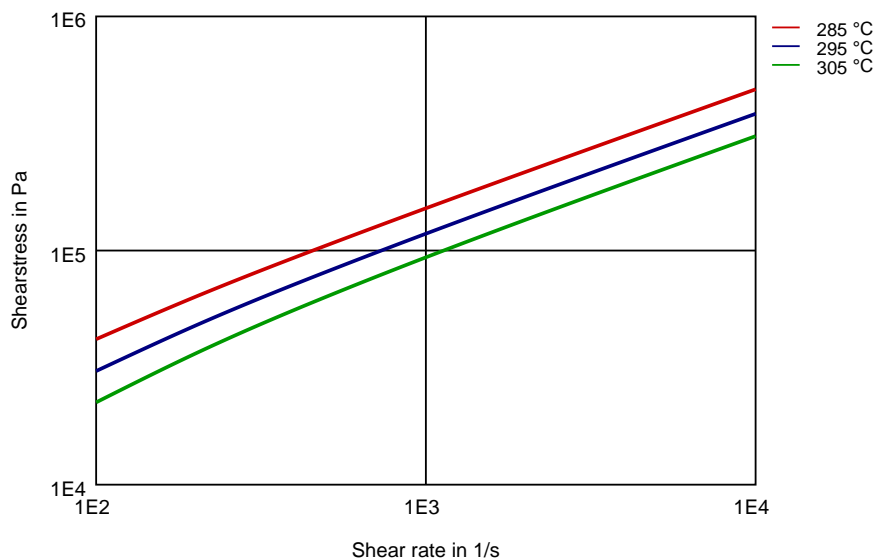

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa




DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

Dynamic Shear modulus-temperature (dry)

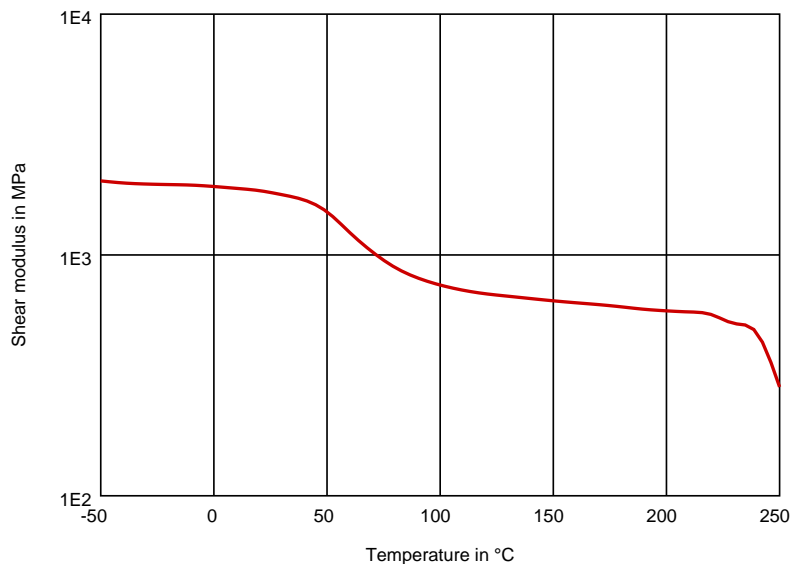

Dynamic Shear modulus-temperature (cond.)

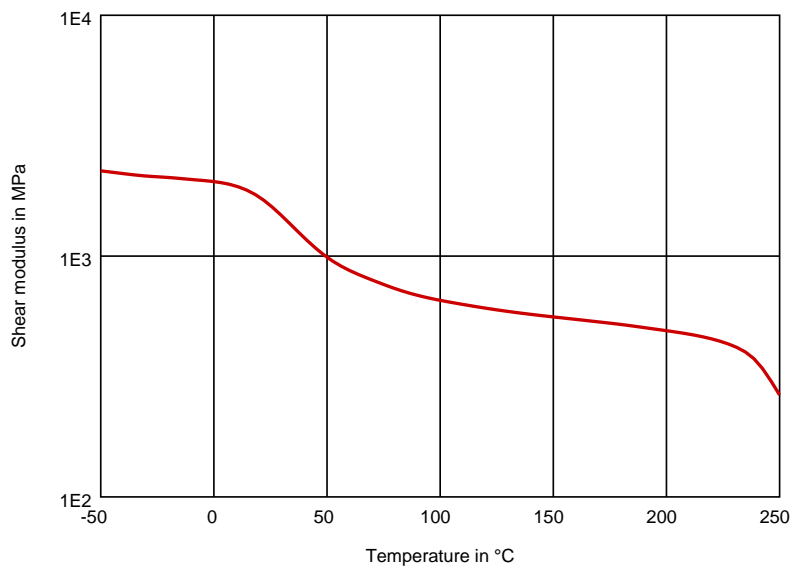

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa




DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

Dynamic Tensile modulus-temperature (dry)

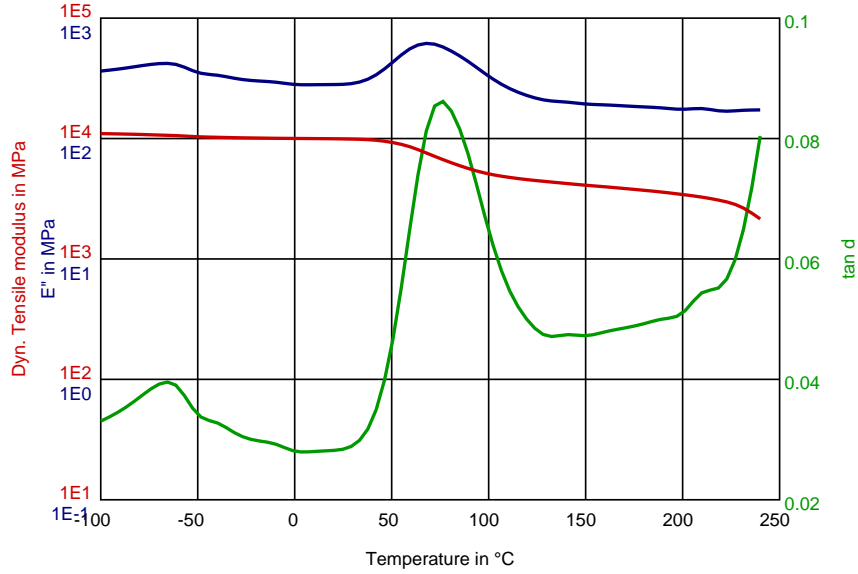


Dynamic Tensile modulus-temperature (cond.)

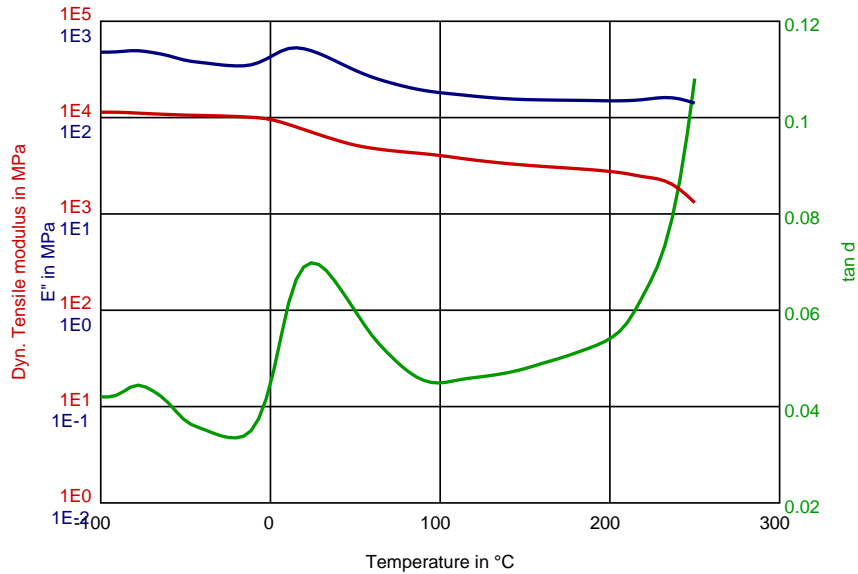

DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

Stress-strain (dry)

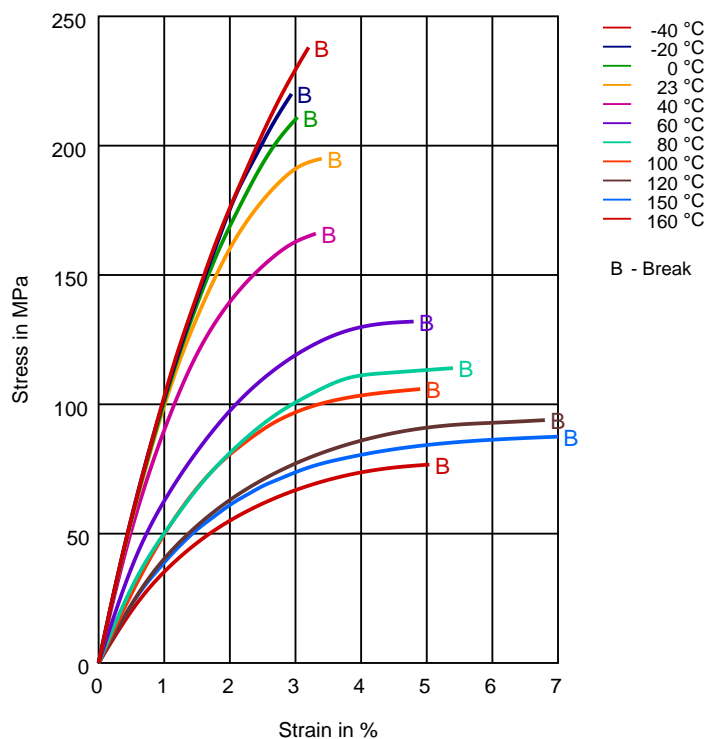

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

Stress-strain (cond.)

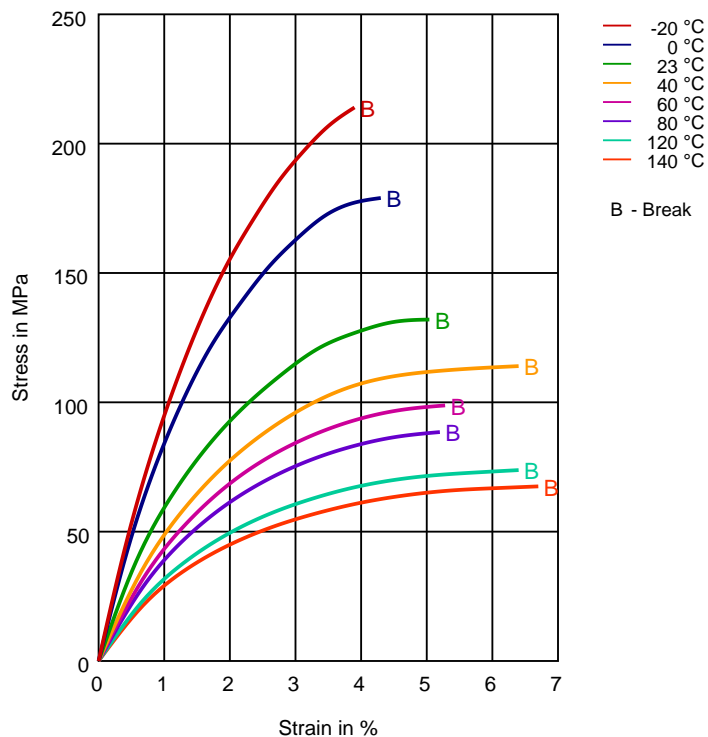

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

Secant modulus-strain (dry)

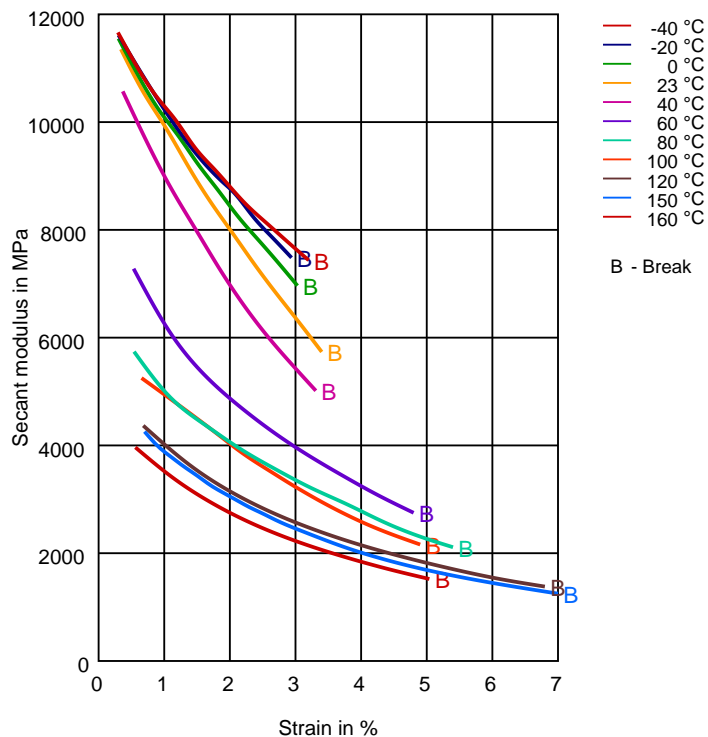

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999


EMAIL: fumei@foomx.com



DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

Secant modulus-strain (cond.)

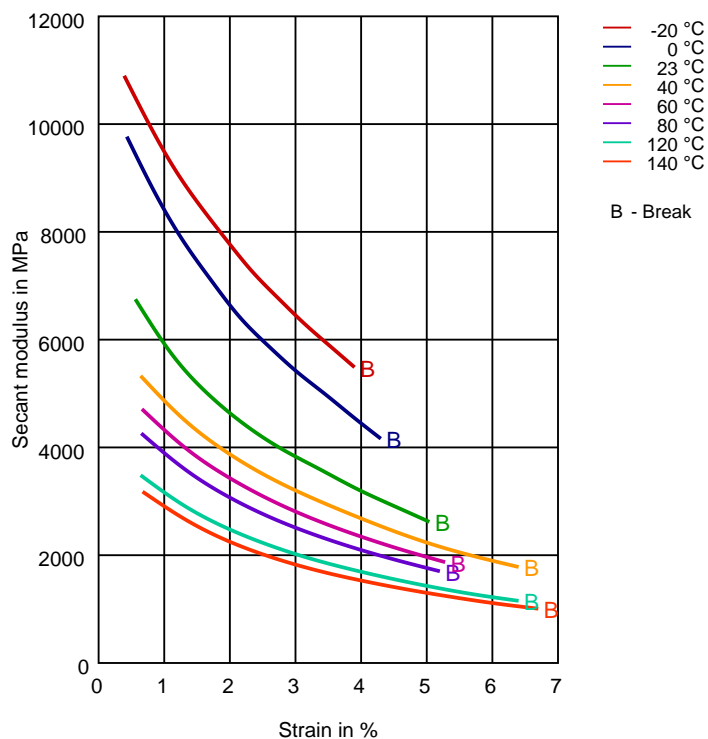

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

Stress-strain (isochronous) 23°C(cond.)

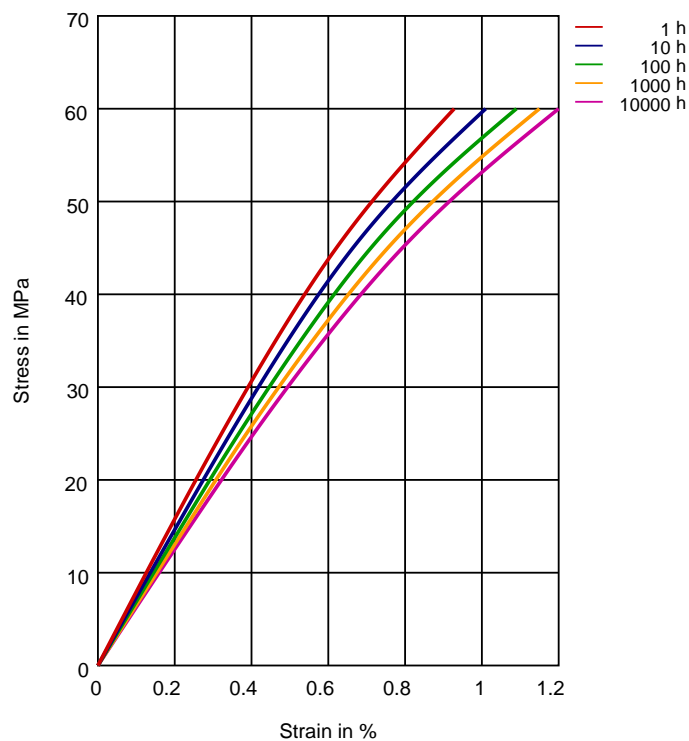

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

Creep modulus-time 23 °C(cond.)

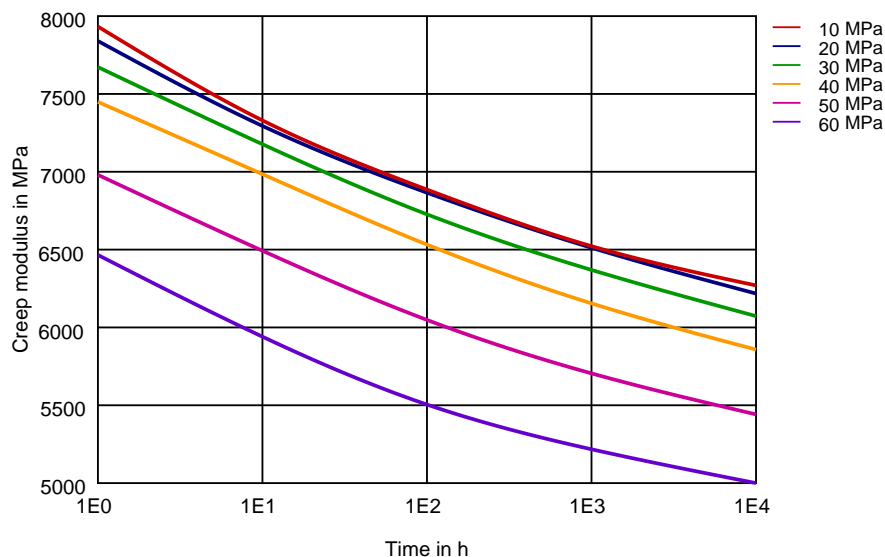

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

Stress-strain (isochronous) 80°C (cond.)

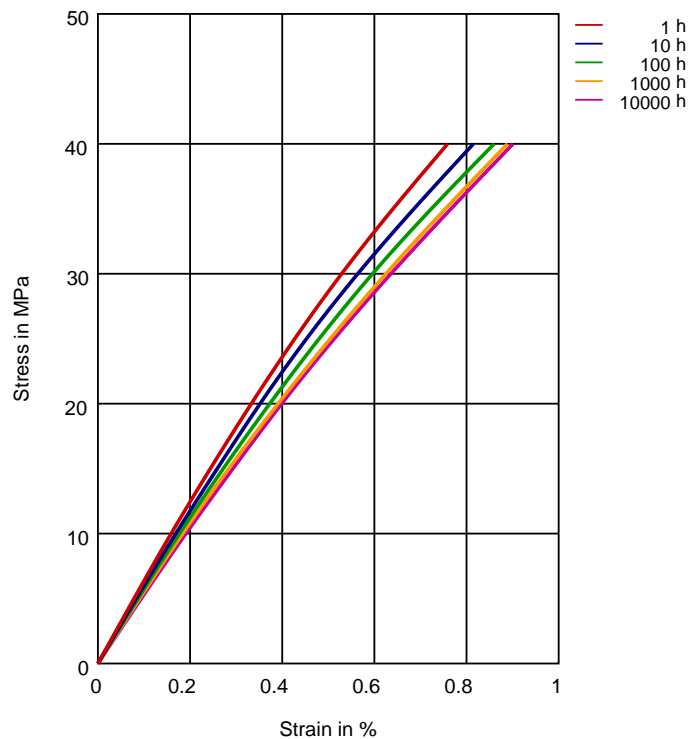

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

Creep modulus-time 80 °C (cond.)

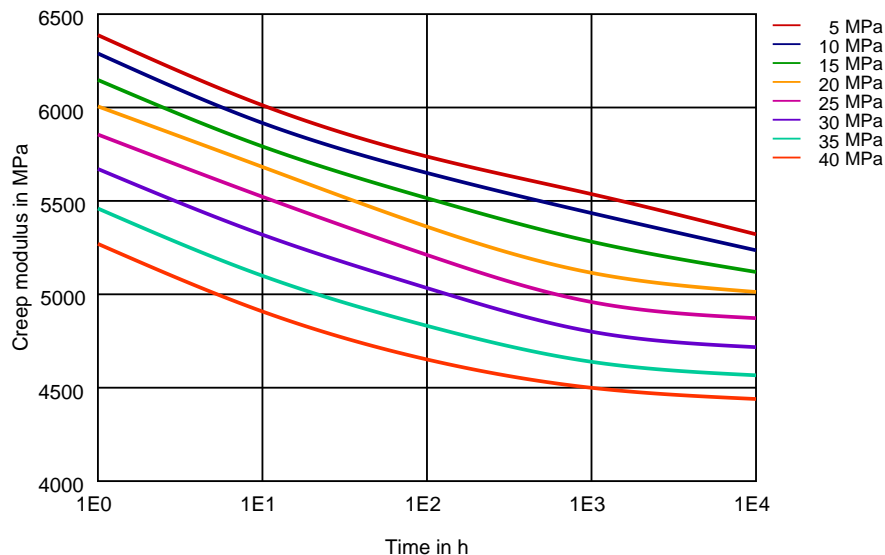

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

Stress-strain (isochronous) 100°C (cond.)

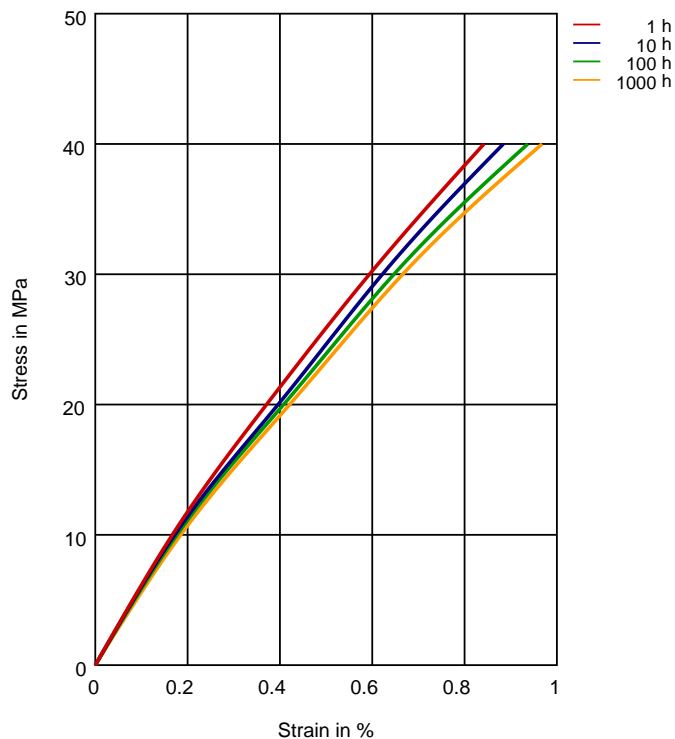

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

Creep modulus-time 100°C(cond.)

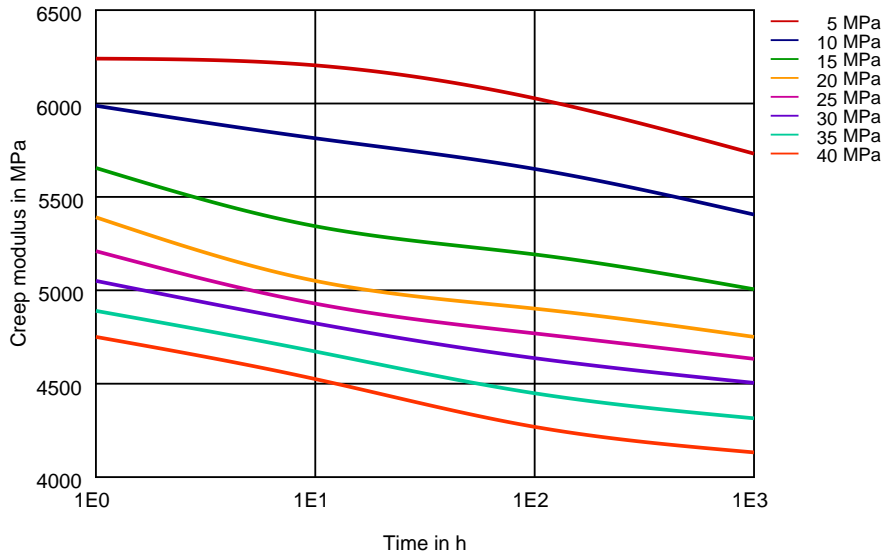

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

Stress-strain (isochronous) 140°C (cond.) (measured on Zytel® 70G30HSL BK039B)

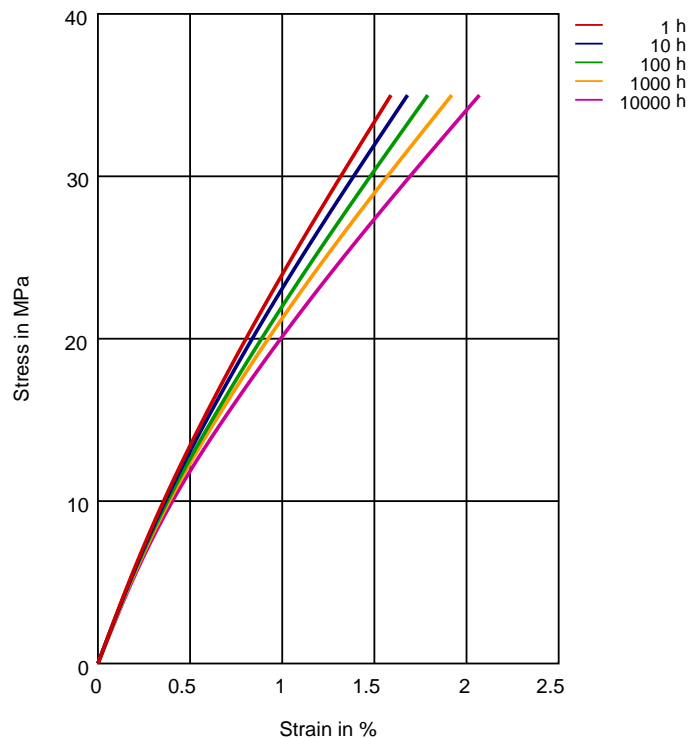

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa




DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

Creep modulus-time 140 °C (cond.) (measured on Zytel® 70G30HSL BK039B)

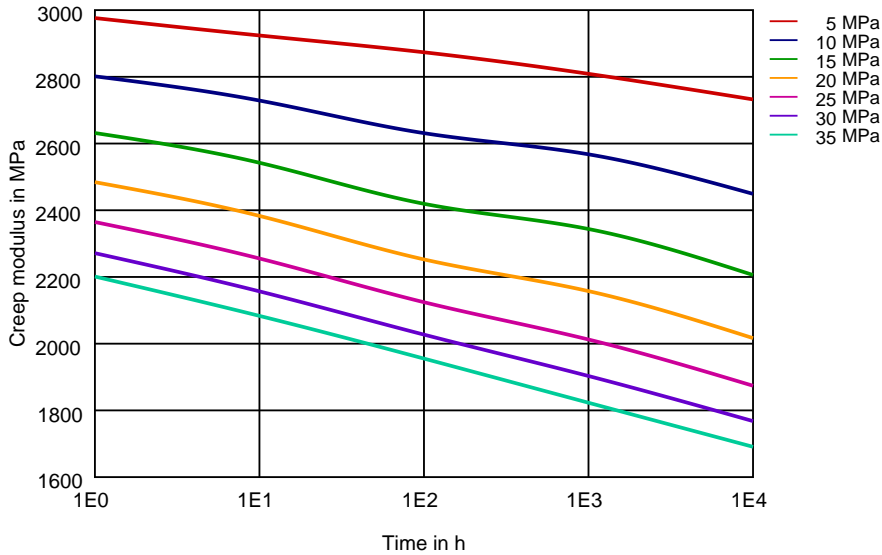

Coeff. of linear thermal expansion, normal

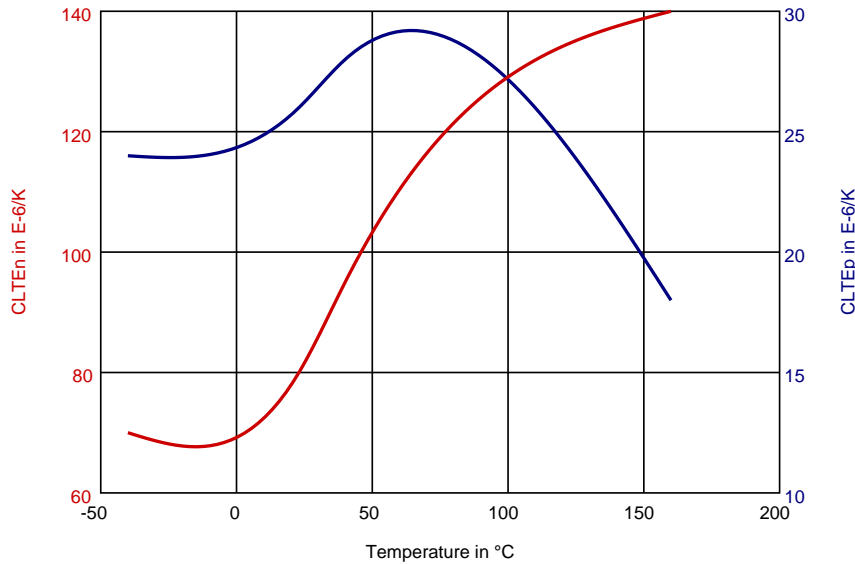

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa



DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23 °C)
- ✓ Citric Acid solution (10% by mass) (23 °C)
- ✓ Lactic Acid (10% by mass) (23 °C)
- ✗ Hydrochloric Acid (36% by mass) (23 °C)
- ✗ Nitric Acid (40% by mass) (23 °C)
- ✗ Sulfuric Acid (38% by mass) (23 °C)
- ✗ Sulfuric Acid (5% by mass) (23 °C)
- ✗ Chromic Acid solution (40% by mass) (23 °C)

Bases

- ✗ Sodium Hydroxide solution (35% by mass) (23 °C)
- ✓ Sodium Hydroxide solution (1% by mass) (23 °C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23 °C)

Alcohols

- ✓ Isopropyl alcohol (23 °C)
- ✓ Methanol (23 °C)
- ✓ Ethanol (23 °C)

Hydrocarbons

- ✓ n-Hexane (23 °C)
- ✓ Toluene (23 °C)
- ✓ iso-Octane (23 °C)

Ketones

- ✓ Acetone (23 °C)

Ethers

- ✓ Diethyl ether (23 °C)

Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23 °C)
- ✓ SAE 10W40 multigrade motor oil (130 °C)
- ✓ SAE 80/90 hypoid-gear oil (130 °C)
- ✓ Insulating Oil (23 °C)
- ✓ Motor oil OS206 304 Ref.Eng.Oil, ISP (135 °C)
- ✓ Automatic hypoid-gear oil Shell Donax TX (135 °C)
- ✓ Hydraulic oil Pentosin CHF 202 (125 °C)

Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5 (60 °C)
- ✓ ISO 1817 Liquid 2 - M15E4 (60 °C)
- ✓ ISO 1817 Liquid 3 - M3E7 (60 °C)

Revised: 2018-08-09

Page: 19 of 21

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com

Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

- ✓ ISO 1817 Liquid 4 - M15 (60°C)
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ✗ Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✗ Sodium Hypochlorite solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)
- ✗ Zinc Chloride solution (50% by mass) (23°C)

Other

- ✓ Ethyl Acetate (23°C)
- ✗ Hydrogen peroxide (23°C)
- ✓ DOT No. 4 Brake fluid (130°C)
- ✓ DOT No. 4 Brake fluid (120°C)
- ✓ Ethylene Glycol (50% by mass) in water (108°C)
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
- ✓ 50% Oleic acid + 50% Olive Oil (23°C)
- ✓ Water (23°C)
- ✓ Water (90°C)
- ✗ Phenol solution (5% by mass) (23°C)
- ✓ Coolant Glysantin G48, 1:1 in water (125°C)

Symbols used:

- ✓ possibly resistant

Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).

- ✗ not recommended - see explanation

Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 160 mil (Hytrel® measured at 80 mil), IEC Electrical properties measured at 80 mil, all ASTM properties measured at 120 mil, and test temperatures are 73°F unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com

Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Zytel® 70G30HSLR NC010

NYLON RESIN

license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa

