

DuPont™ Zytel® 70G33L NC010

NYLON RESIN

Product Information

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, DuPont recommends, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry.

Zytel® 70G33L NC010 is a 33% glass fiber reinforced polyamide 66 resin for injection molding.

General information	Value	Unit	Test Standard
Resin Identification	PA66-GF33	-	ISO 1043
Part Marking Code	PA66-GF33	-	ISO 11469
Rheological properties	dry / cond	Unit	Test Standard
Molding shrinkage, parallel	0.3 / -	%	ISO 294-4, 2577
Molding shrinkage, normal	1.1 / -	%	ISO 294-4, 2577
Mechanical properties (TPE)	dry / cond	Unit	Test Standard
Abrasion resistance	10 / *	mm ³	ISO 4649
Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	10000 / 8000	MPa	ISO 527-1/-2
Stress at break	200 / 140	MPa	ISO 527-1/-2
Strain at break	3.5 / 5	%	ISO 527-1/-2
Flexural Modulus	9000 / 6000	MPa	ISO 178
Flexural Strength	290 / 200	MPa	ISO 178
Compressive strength	240 / -	MPa	ISO 604
Shear Strength	90 / -	MPa	ASTM D 732
Tensile creep modulus			ISO 899-1
1h	* / 8000	MPa	
1000h	* / 5500	MPa	
Charpy impact strength			ISO 179/1eU
73°F	85 / 100	kJ/m ²	
-22°F	70 / 75	kJ/m ²	
Charpy notched impact strength			ISO 179/1eA
73°F	13 / 17	kJ/m ²	
-22°F	10 / 10	kJ/m ²	
-40°F	10 / 10	kJ/m ²	
Izod notched impact strength			ISO 180/1A
73°F	12 / 15	kJ/m ²	
-22°F	10 / 10	kJ/m ²	
-40°F	10 / 10	kJ/m ²	
Izod impact strength			ISO 180/1U
73°F	80 / 90	kJ/m ²	
-22°F	70 / 70	kJ/m ²	
Hardness, Rockwell, M-scale	101 / -	-	ISO 2039-2
Thermal properties	dry / cond	Unit	Test Standard
Melting temperature, 18°F/min	262 / *	°C	ISO 11357-1/-3
Glass transition temperature, 18°F/min	80 / -	°C	ISO 11357-1/-2
Temp. of deflection under load			ISO 75-1/-2
260 psi	252 / *	°C	
65 psi	261 / *	°C	

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com

Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Zytel® 70G33L NC010

NYLON RESIN

Coeff. of linear therm. expansion, parallel	18 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion			ISO 11359-1/-2
normal	83 / *	E-6/K	
Normal, -40-23°C	65 / *	E-6/K	
Normal, 55-160°C	140 / *	E-6/K	
Parallel, -40-23°C	24 / *	E-6/K	
Parallel, 55-160°C	13 / *	E-6/K	
Thermal conductivity of melt	0.22	W/(m K)	-
Spec. heat capacity solid	1330	J/(kg K)	- C
Spec. heat capacity of melt	2210	J/(kg K)	-
RTI, electrical			UL 746B
30mil	130 / *	°C	
60mil	130 / *	°C	
120mil	130	°C	
RTI, impact			UL 746B
30mil	120	°C	
60mil	120 / *	°C	
120mil	120	°C	
RTI, strength			UL 746B
30mil	130	°C	
60mil	130 / *	°C	
120mil	130	°C	
C: Calculated			
Flammability	dry / cond	Unit	Test Standard
Burning Behav. at 60mil nom. thickn.	HB / *	class	IEC 60695-11-10
Thickness tested	1.5 / *	mm	IEC 60695-11-10
UL recognition	yes / *	-	UL 94
Burning Behav. at thickness h	HB / *	class	IEC 60695-11-10
Thickness tested	0.71 / *	mm	IEC 60695-11-10
UL recognition	yes / *	-	UL 94
Oxygen index	24 / *	%	ISO 4589-1/-2
FMVSS Class	SE/B	-	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	28	mm/min	ISO 3795 (FMVSS 302)
Electrical properties	dry / cond	Unit	Test Standard
Relative permittivity			IEC 62631-2-1
100Hz	4.2 / -	-	
1MHz	4 / -	-	
Dissipation factor			IEC 62631-2-1
100Hz	100 / -	E-4	
1MHz	150 / -	E-4	
Volume resistivity	1E13 / -	Ohm*m	IEC 62631-3-1
Comparative tracking index	600 / -	-	IEC 60112
Other properties	dry / cond	Unit	Test Standard
Humidity absorption, 80mil	1.8 / *	%	Sim. to ISO 62
Water absorption, 80mil	5.7 / *	%	Sim. to ISO 62
Density	1390 / -	kg/m ³	ISO 1183
Water Absorption, Immersion 24h	1.2 ^[1] / *	%	Sim. to ISO 62
1: 2mm thickness			
VDA Properties	dry / cond	Unit	Test Standard
Emission of organic compounds	6	µgC/g	VDA 277
Odor test	4.5	class	VDA 270
Fogging, F-value (refraction)	95 / *	%	ISO 6452
Fogging, G-value (condensate)	0.3 / *	mg	ISO 6452
Injection	dry / cond	Unit	Test Standard
Drying Recommended	yes	-	-
Drying Temperature	≥80	°C	-

Revised: 2018-05-16

Page: 2 of 13

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com

Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Zytel® 70G33L NC010

NYLON RESIN

Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.2	%	-
Melt Temperature Optimum	295	°C	-
Min. melt temperature	285	°C	-
Max. melt temperature	305	°C	-
Max. screw tangential speed	0.2 / *	m/s	-
Mold Temperature Optimum	100	°C	-
Min. mold temperature	70	°C	-
Max. mold temperature	120	°C	-
Hold pressure range	50 - 100	MPa	-
Hold pressure time	3	s/mm	-
Ejection temperature	210	°C	-

Characteristics

Processing	• Injection Molding		
Delivery form	• Pellets		
Additives	• Lubricants	• Release agent	
Regional Availability	• North America • Europe	• Asia Pacific • South and Central America	• Near East/Africa • Global

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa




DuPont™ Zytel® 70G33L NC010

NYLON RESIN

Diagrams

Stress-strain (dry)

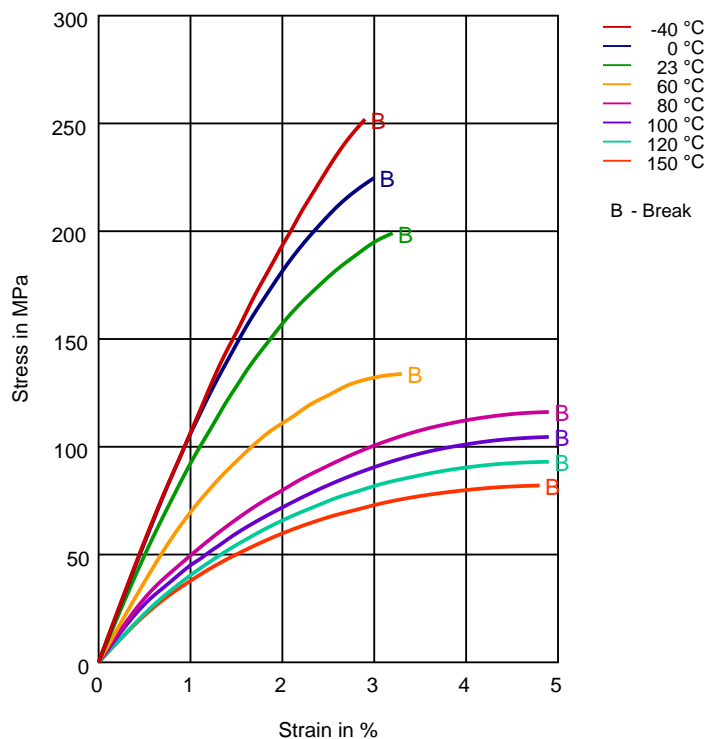

Revised: 2018-05-16

Page: 4 of 13

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa


Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Zytel® 70G33L NC010

NYLON RESIN

Stress-strain (cond.)

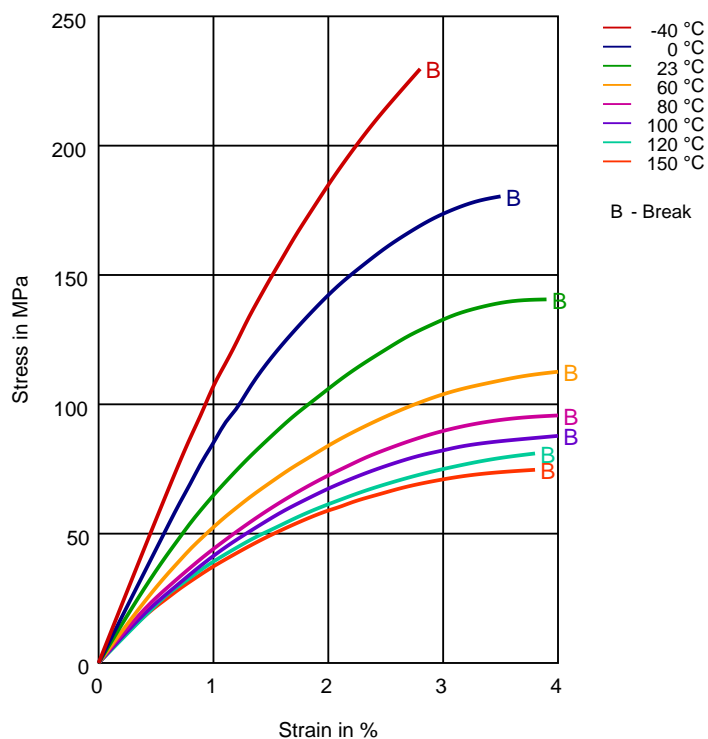

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® 70G33L NC010

NYLON RESIN

Secant modulus-strain (dry)

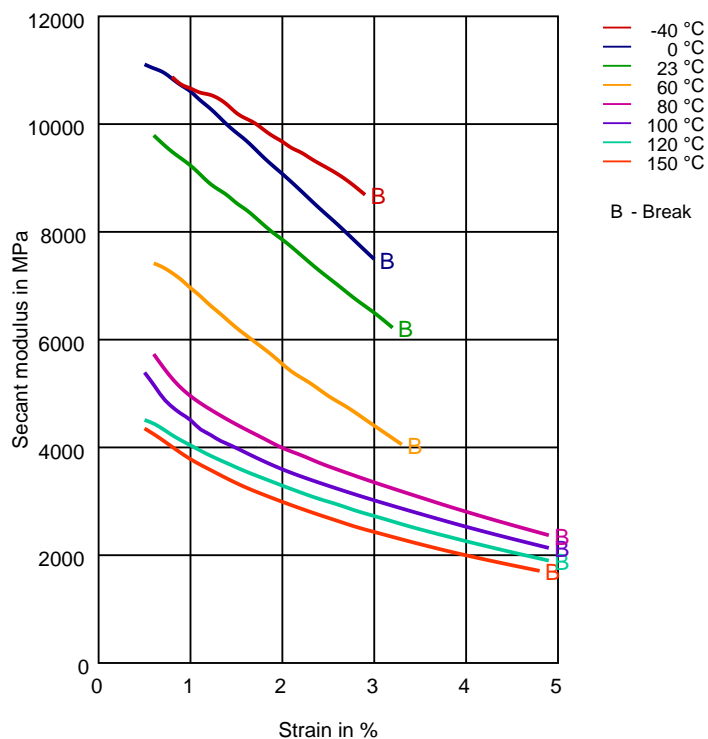

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® 70G33L NC010

NYLON RESIN

Secant modulus-strain (cond.)

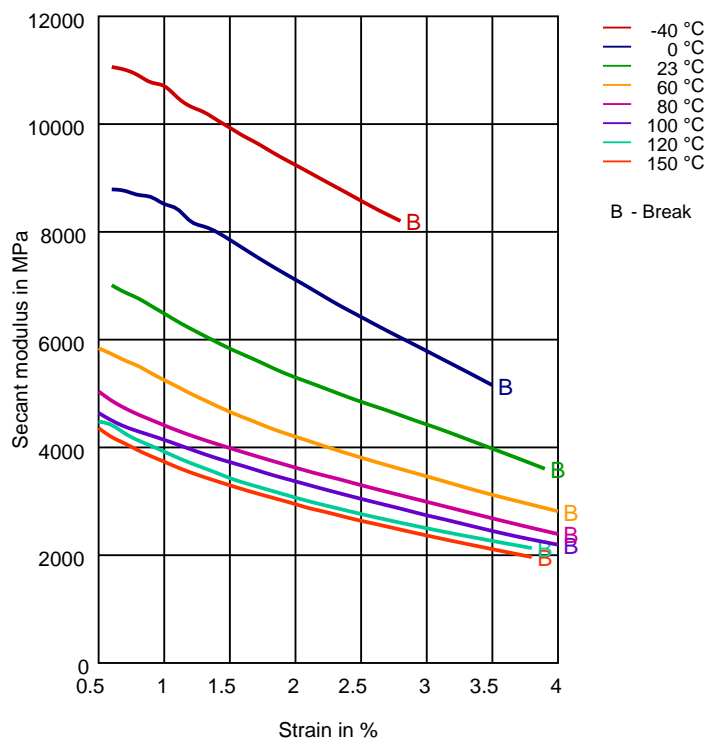

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® 70G33L NC010

NYLON RESIN

Stress-strain (isochronous) 23°C(cond.)

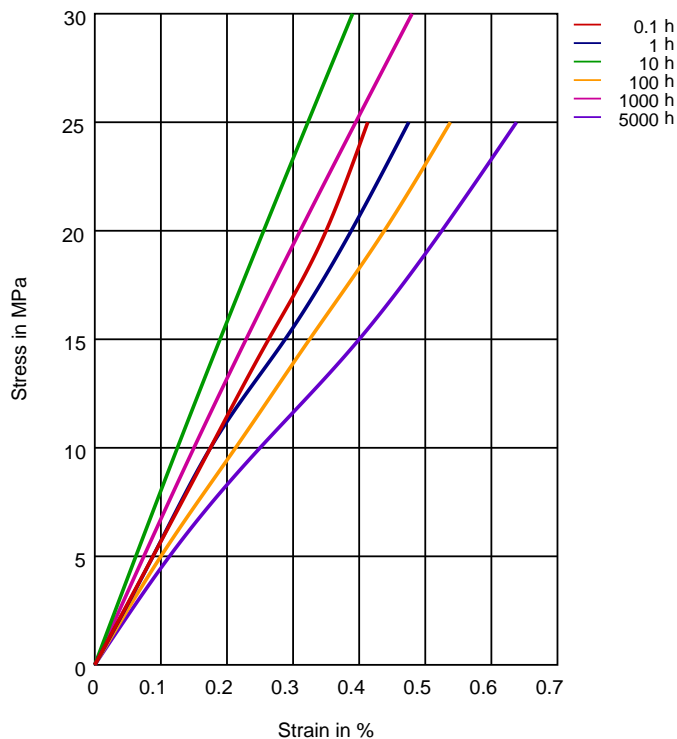

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® 70G33L NC010

NYLON RESIN

Stress-strain (isochronous) 100°C (cond.)

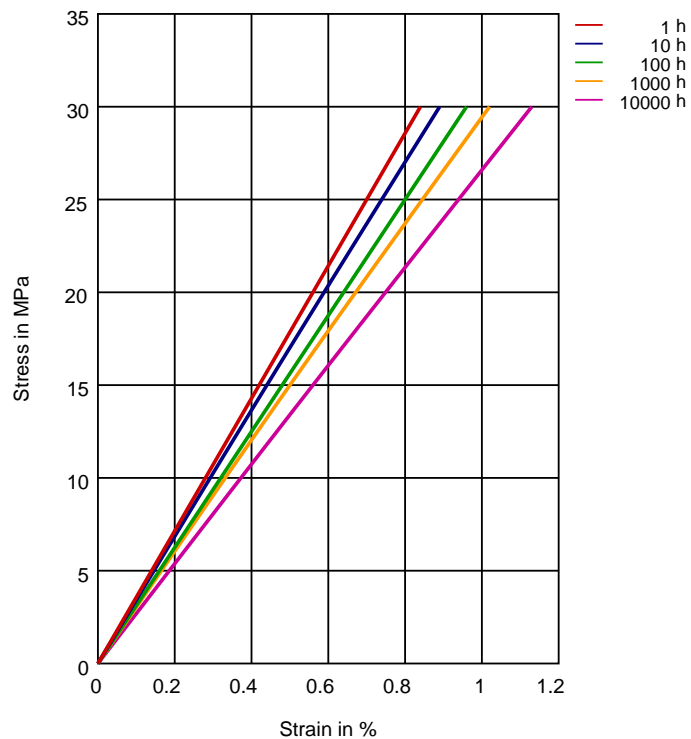

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® 70G33L NC010

NYLON RESIN

Stress-strain (isochronous) 150°C (cond.)

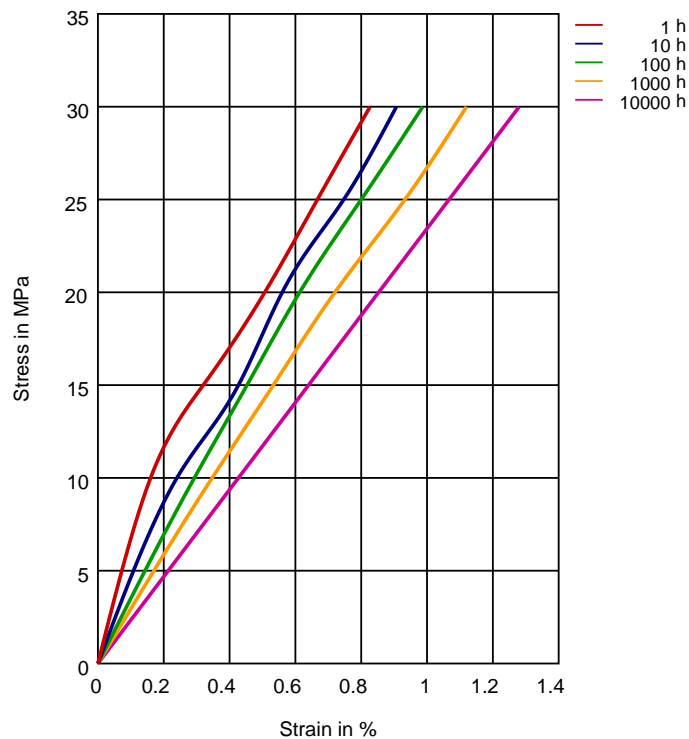

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® 70G33L NC010

NYLON RESIN

Stress-strain (isochronous) 60°C (cond.)

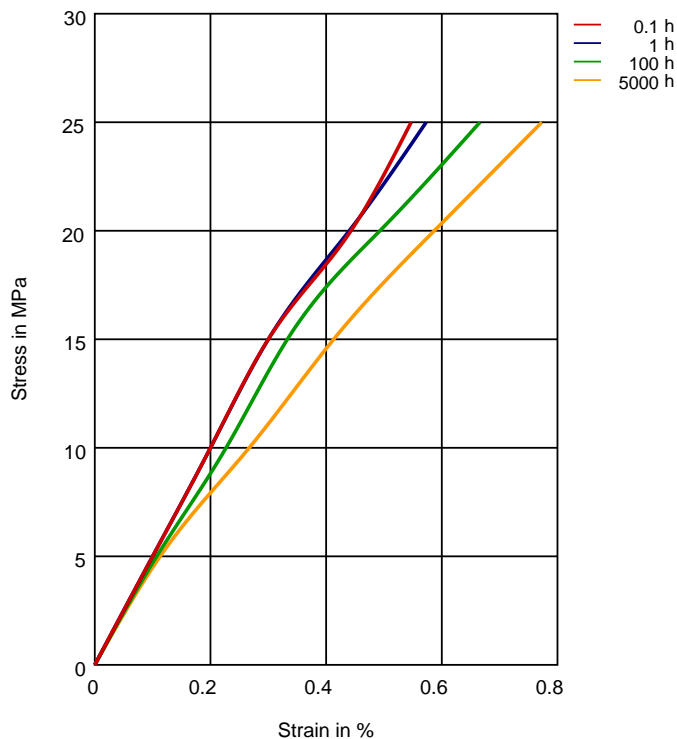

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa



DuPont™ Zytel® 70G33L NC010

NYLON RESIN

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23 °C)
- ✓ Citric Acid solution (10% by mass) (23 °C)
- ✓ Lactic Acid (10% by mass) (23 °C)
- ✗ Hydrochloric Acid (36% by mass) (23 °C)
- ✗ Nitric Acid (40% by mass) (23 °C)
- ✗ Sulfuric Acid (38% by mass) (23 °C)
- ✗ Sulfuric Acid (5% by mass) (23 °C)
- ✗ Chromic Acid solution (40% by mass) (23 °C)

Bases

- ✗ Sodium Hydroxide solution (35% by mass) (23 °C)
- ✓ Sodium Hydroxide solution (1% by mass) (23 °C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23 °C)

Alcohols

- ✓ Isopropyl alcohol (23 °C)
- ✓ Methanol (23 °C)
- ✓ Ethanol (23 °C)

Hydrocarbons

- ✓ n-Hexane (23 °C)
- ✓ Toluene (23 °C)
- ✓ iso-Octane (23 °C)

Ketones

- ✓ Acetone (23 °C)

Ethers

- ✓ Diethyl ether (23 °C)

Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23 °C)
- ✓ SAE 10W40 multigrade motor oil (130 °C)
- ✓ SAE 80/90 hypoid-gear oil (130 °C)
- ✓ Insulating Oil (23 °C)

Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5 (60 °C)
- ✓ ISO 1817 Liquid 2 - M15E4 (60 °C)
- ✓ ISO 1817 Liquid 3 - M3E7 (60 °C)
- ✓ ISO 1817 Liquid 4 - M15 (60 °C)
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23 °C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23 °C)



DuPont™ Zytel® 70G33L NC010

NYLON RESIN

- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✗ Sodium Hypochlorite solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)
- ✗ Zinc Chloride solution (50% by mass) (23°C)

Other

- ✓ Ethyl Acetate (23°C)
- ✗ Hydrogen peroxide (23°C)
- ✓ DOT No. 4 Brake fluid (130°C)
- ✓ Ethylene Glycol (50% by mass) in water (108°C)
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
- ✓ 50% Oleic acid + 50% Olive Oil (23°C)
- ✓ Water (23°C)
- ✓ Water (90°C)
- ✗ Phenol solution (5% by mass) (23°C)

Symbols used:

✓ possibly resistant

Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).

✗ not recommended - see explanation

Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 160 mil (Hytrel® measured at 80 mil), IEC Electrical properties measured at 80 mil, all ASTM properties measured at 120 mil, and test temperatures are 73°F unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa

