

# DuPont™ Zytel® 80G33L NC010

## NYLON RESIN

### Product Information

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, DuPont recommends, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry.

**Zytel® 80G33L NC010 is a 33% glass fiber reinforced polyamide 66 resin with outstanding impact resistance developed using DuPont Super Tough technology.**

General information	Value	Unit	Test Standard
Resin Identification	PA66-IGF33	-	ISO 1043
Part Marking Code	PA66-IGF33	-	ISO 11469
Rheological properties	dry / cond	Unit	Test Standard
Molding shrinkage, parallel	0.3 / -	%	ISO 294-4, 2577
Molding shrinkage, normal	0.8 / -	%	ISO 294-4, 2577
Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	8700 / 5800	MPa	ISO 527-1/-2
Stress at break	142 / 95	MPa	ISO 527-1/-2
Strain at break	4 / 5	%	ISO 527-1/-2
Flexural Modulus	7400 / 5200	MPa	ISO 178
Charpy impact strength			ISO 179/1eU
73 °F	91 / 80	kJ/m <sup>2</sup>	
-22 °F	80 / 75	kJ/m <sup>2</sup>	
Charpy notched impact strength			ISO 179/1eA
73 °F	20 / 22	kJ/m <sup>2</sup>	
-22 °F	14 / 14	kJ/m <sup>2</sup>	
-40 °F	13 / 13	kJ/m <sup>2</sup>	
Izod notched impact strength			ISO 180/1A
73 °F	21 / 20	kJ/m <sup>2</sup>	
-22 °F	14 / 10	kJ/m <sup>2</sup>	
-40 °F	15 / 10	kJ/m <sup>2</sup>	
Izod impact strength			ISO 180/1U
73 °F	74 / 80	kJ/m <sup>2</sup>	
-22 °F	80 / 75	kJ/m <sup>2</sup>	
Thermal properties	dry / cond	Unit	Test Standard
Melting temperature, 18 °F/min	262 / *	°C	ISO 11357-1/-3
Temp. of deflection under load			ISO 75-1/-2
260 psi	247 / *	°C	
65 psi	262 / *	°C	
Coeff. of linear therm. expansion, parallel	15 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	119 / *	E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.22	W/(m K)	-
Spec. heat capacity of melt	2200	J/(kg K)	-
Eff. thermal diffusivity	8.5E-8	m <sup>2</sup> /s	-
RTI, electrical			UL 746B
30mil	120 / *	°C	
60mil	120 / *	°C	
120mil	120	°C	



# DuPont™ Zytel® 80G33L NC010

## NYLON RESIN

RTI, impact			UL 746B
30mil	65	°C	
60mil	105 / *	°C	
120mil	105	°C	
RTI, strength			UL 746B
30mil	85	°C	
60mil	95 / *	°C	
120mil	105	°C	
<b>Flammability</b>	<b>dry / cond</b>	<b>Unit</b>	<b>Test Standard</b>
Burning Behav. at 60mil nom. thickn.	HB / *	class	IEC 60695-11-10
Thickness tested	1.5 / *	mm	IEC 60695-11-10
UL recognition	yes / *	-	UL 94
Burning Behav. at thickness h	HB / *	class	IEC 60695-11-10
Thickness tested	0.75 / *	mm	IEC 60695-11-10
UL recognition	yes / *	-	UL 94
Oxygen index	23 / *	%	ISO 4589-1/-2
Glow Wire Flammability Index			IEC 60695-2-12
30mil	650 / -	°C	
60mil	650 / -	°C	
120mil	775 / -	°C	
Glow Wire Ignition Temperature			IEC 60695-2-13
30mil	675 / -	°C	
60mil	675 / -	°C	
120mil	725 / -	°C	
FMVSS Class	SE/B	-	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	23	mm/min	ISO 3795 (FMVSS 302)
<b>Electrical properties</b>	<b>dry / cond</b>	<b>Unit</b>	<b>Test Standard</b>
Comparative tracking index	- / 600	-	IEC 60112
<b>Other properties</b>	<b>dry / cond</b>	<b>Unit</b>	<b>Test Standard</b>
Humidity absorption, 80mil	1.5 / *	%	Sim. to ISO 62
Water absorption, 80mil	4.5 / *	%	Sim. to ISO 62
Density	1320 / -	kg/m <sup>3</sup>	ISO 1183
Density of melt	1120	kg/m <sup>3</sup>	-
Water Absorption, Immersion 24h	0.83 / *	%	Sim. to ISO 62
<b>VDA Properties</b>	<b>dry / cond</b>	<b>Unit</b>	<b>Test Standard</b>
Emission of organic compounds	25	µgC/g	VDA 277
Odor test	3	class	VDA 270
Fogging, G-value (condensate)	0.8 / *	mg	ISO 6452
<b>Injection</b>	<b>dry / cond</b>	<b>Unit</b>	<b>Test Standard</b>
Drying Recommended	yes	-	-
Drying Temperature	≥80	°C	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.2	%	-
Melt Temperature Optimum	295	°C	-
Min. melt temperature	285	°C	-
Max. melt temperature	305	°C	-
Max. screw tangential speed	0.2 / *	m/s	-
Mold Temperature Optimum	80	°C	-
Min. mold temperature	50	°C	-
Max. mold temperature	100	°C	-
Hold pressure range	50 - 100	MPa	-
Hold pressure time	3	s/mm	-
Ejection temperature	210	°C	-
<b>Characteristics</b>			
Processing	• Injection Molding		

Revised: 2016-12-19

Page: 2 of 9

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com



Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.

# DuPont™ Zytel® 80G33L NC010

## NYLON RESIN

Delivery form	• Pellets		
Additives	• Lubricants	• Release agent	
Regional Availability	• North America	• Asia Pacific	• Near East/Africa
	• Europe	• South and Central America	• Global

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

### North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

### Asia Pacific

TEL: +86 0769-82339888 / 87798999

### Europe/Middle East/Africa




# DuPont™ Zytel® 80G33L NC010

## NYLON RESIN

Diagrams

Stress-strain (dry)

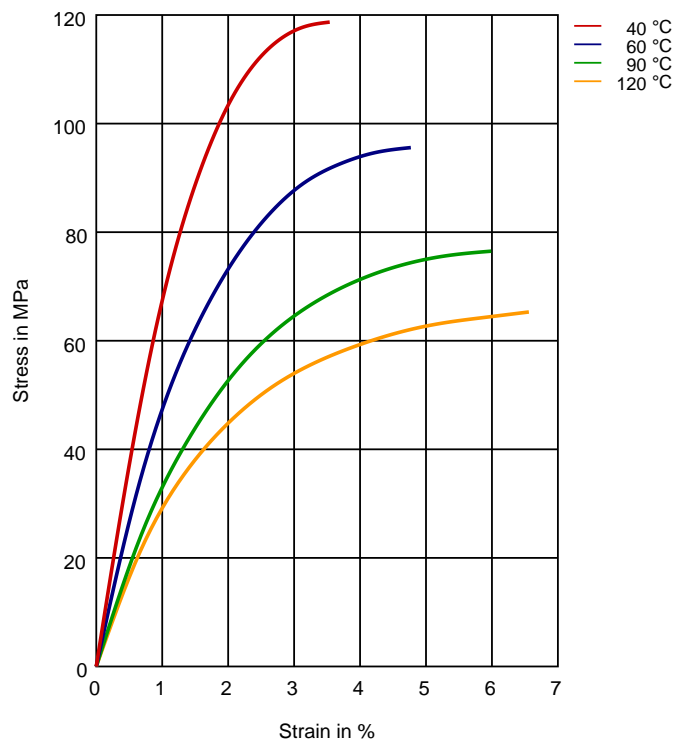

Revised: 2016-12-19

Page: 4 of 9

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa


Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



# DuPont™ Zytel® 80G33L NC010

## NYLON RESIN

Stress-strain (cond.)

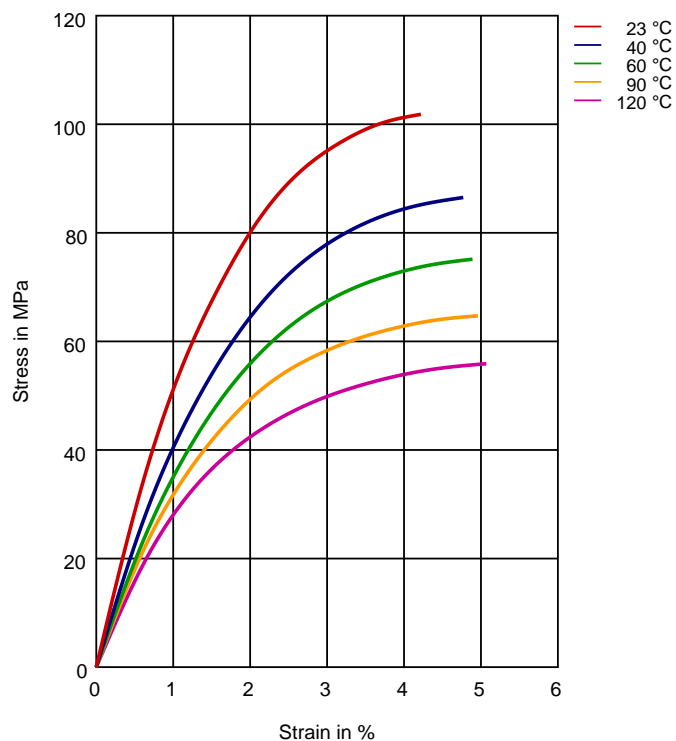

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



# DuPont™ Zytel® 80G33L NC010

## NYLON RESIN

Secant modulus-strain (dry)

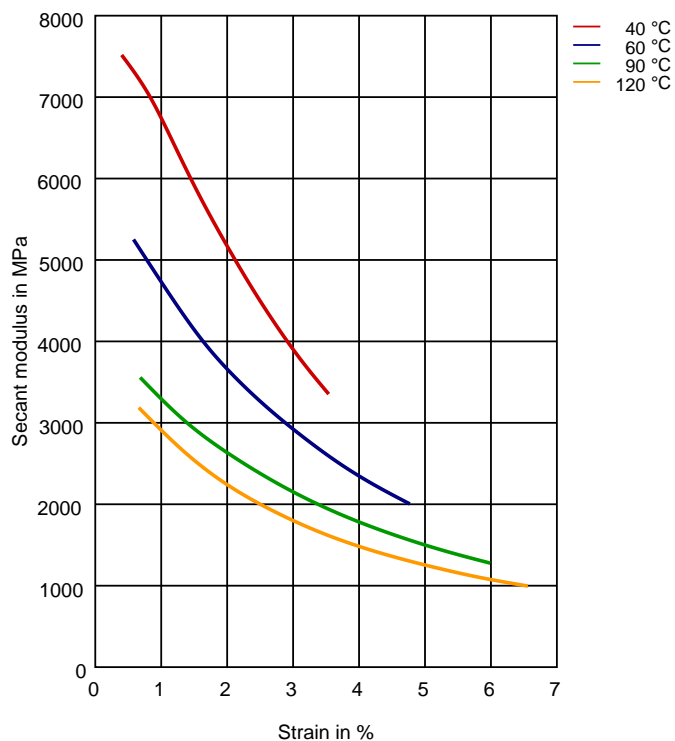

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



# DuPont™ Zytel® 80G33L NC010

## NYLON RESIN

Secant modulus-strain (cond.)

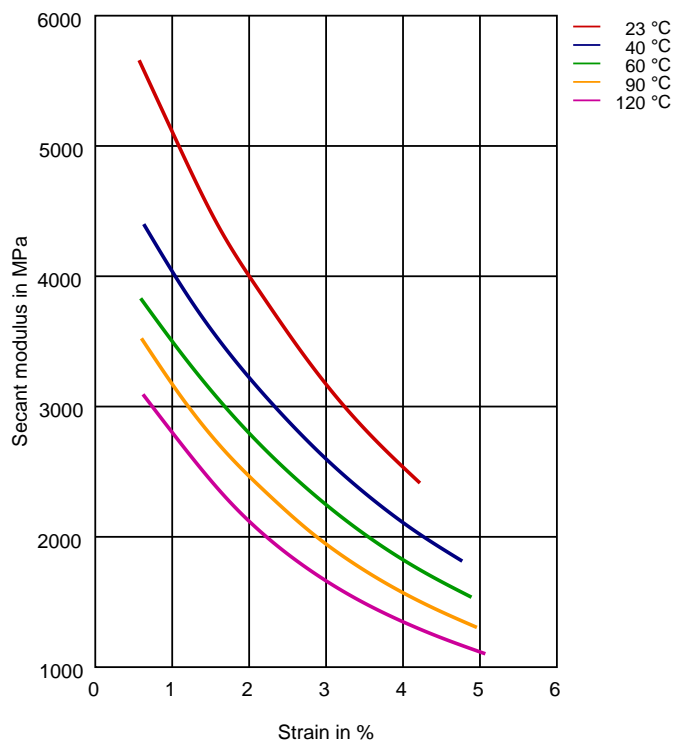

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa



# DuPont™ Zytel® 80G33L NC010

## NYLON RESIN

### Chemical Media Resistance

#### Acids

- ✓ Acetic Acid (5% by mass) (23 °C)
- ✓ Citric Acid solution (10% by mass) (23 °C)
- ✓ Lactic Acid (10% by mass) (23 °C)
- ✗ Hydrochloric Acid (36% by mass) (23 °C)
- ✗ Nitric Acid (40% by mass) (23 °C)
- ✗ Sulfuric Acid (38% by mass) (23 °C)
- ✗ Sulfuric Acid (5% by mass) (23 °C)
- ✗ Chromic Acid solution (40% by mass) (23 °C)

#### Bases

- ✗ Sodium Hydroxide solution (35% by mass) (23 °C)
- ✓ Sodium Hydroxide solution (1% by mass) (23 °C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23 °C)

#### Alcohols

- ✓ Isopropyl alcohol (23 °C)
- ✓ Methanol (23 °C)
- ✓ Ethanol (23 °C)

#### Hydrocarbons

- ✓ n-Hexane (23 °C)
- ✓ Toluene (23 °C)
- ✓ iso-Octane (23 °C)

#### Ketones

- ✓ Acetone (23 °C)

#### Ethers

- ✓ Diethyl ether (23 °C)

#### Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23 °C)
- ✓ SAE 10W40 multigrade motor oil (130 °C)
- ✓ SAE 80/90 hypoid-gear oil (130 °C)
- ✓ Insulating Oil (23 °C)

#### Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5 (60 °C)
- ✓ ISO 1817 Liquid 2 - M15E4 (60 °C)
- ✓ ISO 1817 Liquid 3 - M3E7 (60 °C)
- ✓ ISO 1817 Liquid 4 - M15 (60 °C)
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23 °C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23 °C)





# DuPont™ Zytel® 80G33L NC010

## NYLON RESIN

- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

### Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✗ Sodium Hypochlorite solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)
- ✗ Zinc Chloride solution (50% by mass) (23°C)

### Other

- ✓ Ethyl Acetate (23°C)
- ✗ Hydrogen peroxide (23°C)
- ✓ DOT No. 4 Brake fluid (130°C)
- ✓ Ethylene Glycol (50% by mass) in water (108°C)
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
- ✓ 50% Oleic acid + 50% Olive Oil (23°C)
- ✓ Water (23°C)
- ✗ Water (90°C)
- ✗ Phenol solution (5% by mass) (23°C)

#### Symbols used:

- ✓ possibly resistant

Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).

- ✗ not recommended - see explanation

Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 160 mil (Hytrel® measured at 80 mil), IEC Electrical properties measured at 80 mil, all ASTM properties measured at 120 mil, and test temperatures are 73°F unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

#### North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

#### Asia Pacific

TEL: +86 0769-82339888 / 87798999

#### Europe/Middle East/Africa

