

DuPont™ Zytel® FG101F NC010

NYLON RESIN

Product Information

Zytel® FG101F NC010 is an internally lubricated polyamide 66 resin for injection molding and extrusion. It has been developed for consideration into applications such as parts for the food industry.

FOOD CONTACT

This product is manufactured according to Good Manufacturing Practice (GMP) principles and generally accepted in food contact applications in Europe and the USA when meeting applicable use conditions. For details, individual compliance statements are available from your DuPont representative.

General information	Value	Unit	Test Standard
Resin Identification	PA66	-	ISO 1043
Part Marking Code	PA66	-	ISO 11469
Rheological properties	dry / cond	Unit	Test Standard
Viscosity number	150 ⁽¹⁾ / *	cm ³ / g	ISO 307, 1157, 1628
Molding shrinkage, parallel	1.4 / -	%	ISO 294-4, 2577
Molding shrinkage, normal	1.4 / -	%	ISO 294-4, 2577
Postmolding shrinkage, normal, 48h at 175 °F	0.1 / *	%	ISO 294-4
Postmolding shrinkage, parallel, 48h at 175 °F	0.2 / *	%	ISO 294-4
1: Sulfuric acid 96%			
Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	3100 / 1400	MPa	ISO 527-1/-2
Yield stress	82 / 55	MPa	ISO 527-1/-2
Yield strain	4.5 / 25	%	ISO 527-1/-2
Nominal strain at break	20 / >50	%	ISO 527-1/-2
Strain at Break, 23 °C, 50mm/min	40 / -	%	ISO 527-1/-2
Flexural Modulus	2800 / 1200	MPa	ISO 178
Tensile creep modulus			ISO 899-1
1h	* / 1400	MPa	
1000h	* / 930	MPa	
Charpy impact strength			ISO 179/1eU
73 °F	N / N	kJ/m ²	
-22 °F	400 / N	kJ/m ²	
Charpy notched impact strength			ISO 179/1eA
73 °F	6 / 13	kJ/m ²	
-22 °F	4.5 / 3	kJ/m ²	
Thermal properties	dry / cond	Unit	Test Standard
Melting temperature, 18 °F/min	262 / *	°C	ISO 11357-1/-3
Glass transition temperature, 18 °F/min	60 / -	°C	ISO 11357-1/-2
Temp. of deflection under load			ISO 75-1/-2
260 psi	70 / *	°C	
65 psi	190 / *	°C	
Vicat softening temperature, 90 °F/h, 11 lbf	240 / *	°C	ISO 306
Coeff. of linear therm. expansion, parallel	100 / *	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	110 / *	E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.16	W/(m K)	-
Spec. heat capacity of melt	2790	J/(kg K)	-
Eff. thermal diffusivity	5E-8	m ² /s	-
Flammability	dry / cond	Unit	Test Standard
Oxygen index	28 / *	%	ISO 4589-1/-2
Electrical properties	dry / cond	Unit	Test Standard
Relative permittivity			IEC 62631-2-1
100Hz	3.8 / 8	-	
1MHz	3.6 / 4.6	-	

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com



DuPont™ Zytel® FG101F NC010

NYLON RESIN

Dissipation factor			IEC 62631-2-1
100Hz	140 / -	E-4	
1MHz	180 / 1000	E-4	
Volume resistivity	1E13 / >1E13	Ohm*m	IEC 62631-3-1
Electric strength	31.5 / 26	kV/mm	IEC 60243-1
Other properties	dry / cond	Unit	Test Standard
Humidity absorption, 80mil	2.6 / *	%	Sim. to ISO 62
Water absorption, 80mil	8.5 / *	%	Sim. to ISO 62
Density	1140 / -	kg/m ³	ISO 1183
Density of melt	970	kg/m ³	-
Film Properties	dry / cond	Unit	Test Standard
Strain at yield, parallel	4.5 / *	%	ISO 527-3
Injection	dry / cond	Unit	Test Standard
Drying Recommended	yes	-	-
Drying Temperature	≥80	°C	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.2	%	-
Melt Temperature Optimum	290	°C	-
Min. melt temperature	280	°C	-
Max. melt temperature	300	°C	-
Max. screw tangential speed	0.4 / *	m/s	-
Mold Temperature Optimum	70	°C	-
Min. mold temperature	50	°C	-
Max. mold temperature	90	°C	-
Hold pressure range	50 - 100	MPa	-
Hold pressure time	4	s/mm	-
Ejection temperature	190	°C	-

Characteristics

Processing	• Injection Molding
Delivery form	• Pellets
Additives	• Release agent

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa




DuPont™ Zytel® FG101F NC010


NYLON RESIN

Diagrams

Dynamic Shear modulus-temperature (cond.)

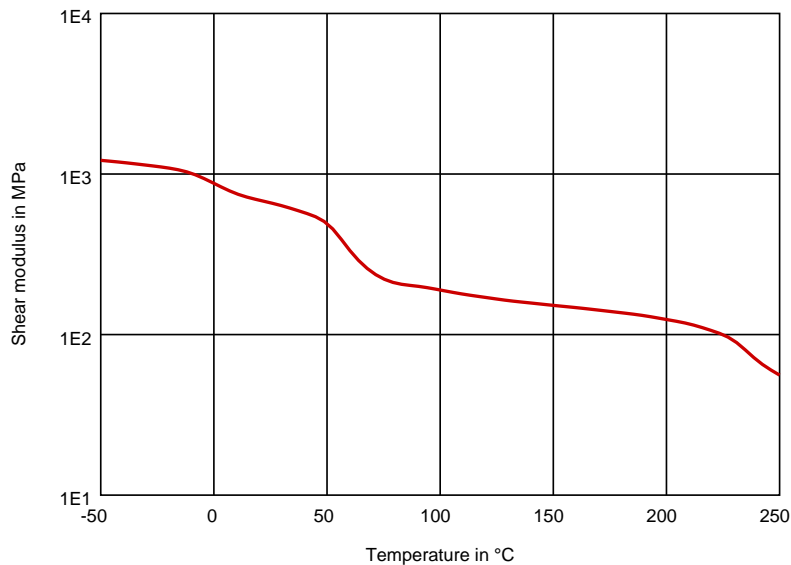


Dynamic Tensile modulus-temperature (dry)

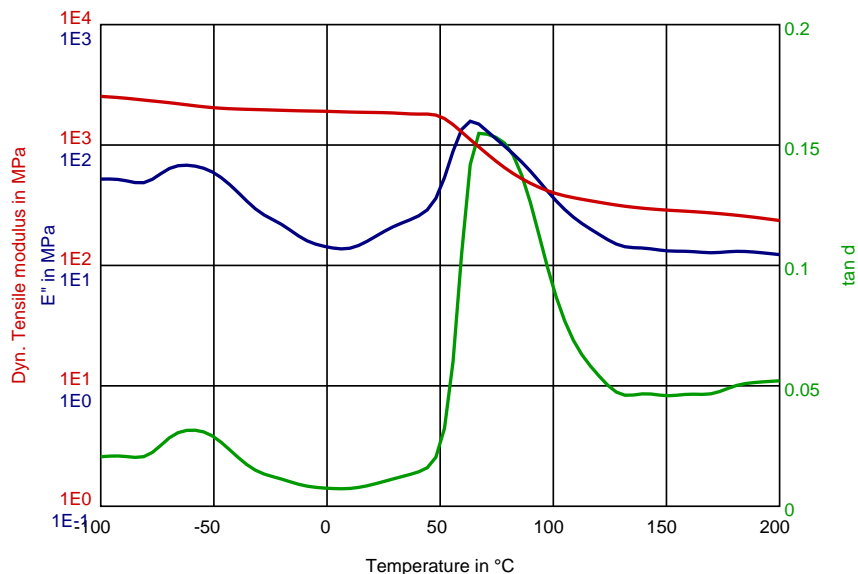

DuPont™ Zytel® FG101F NC010

NYLON RESIN


Dynamic Tensile modulus-temperature (cond.)

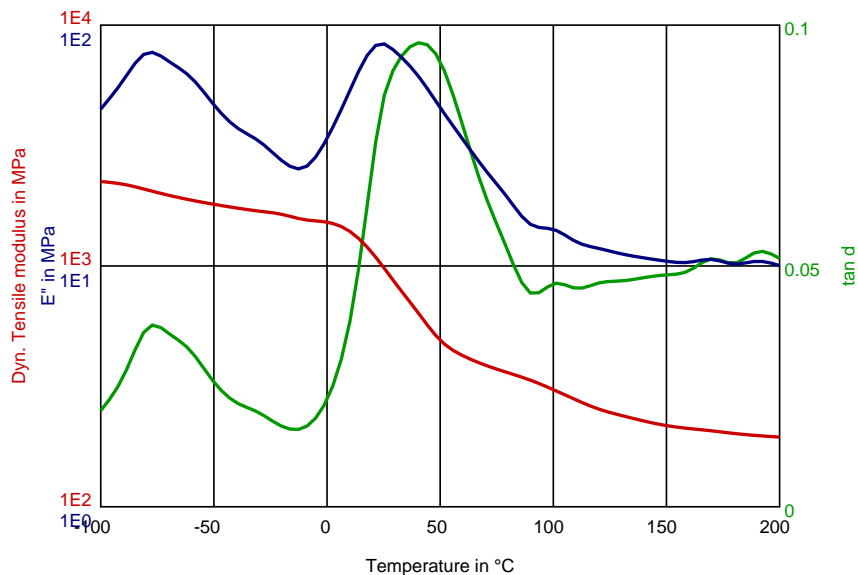

DuPont™ Zytel® FG101F NC010

NYLON RESIN

Stress-strain (dry)

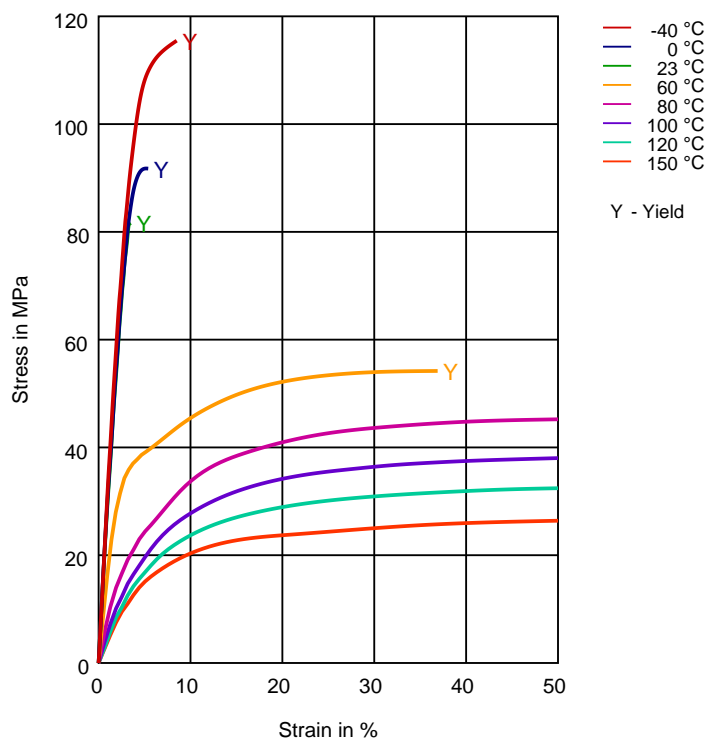

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® FG101F NC010

NYLON RESIN

Stress-strain (cond.)

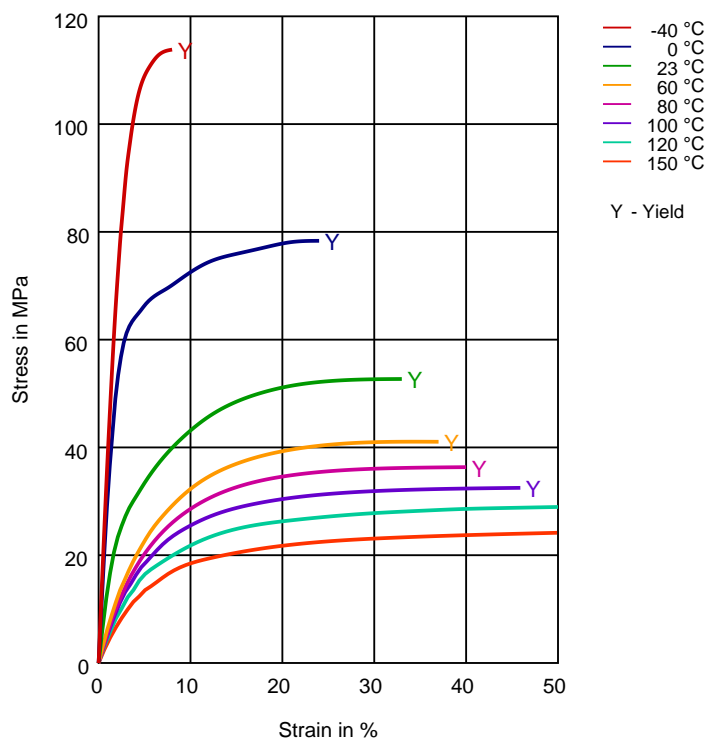

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® FG101F NC010

NYLON RESIN

Secant modulus-strain (dry)

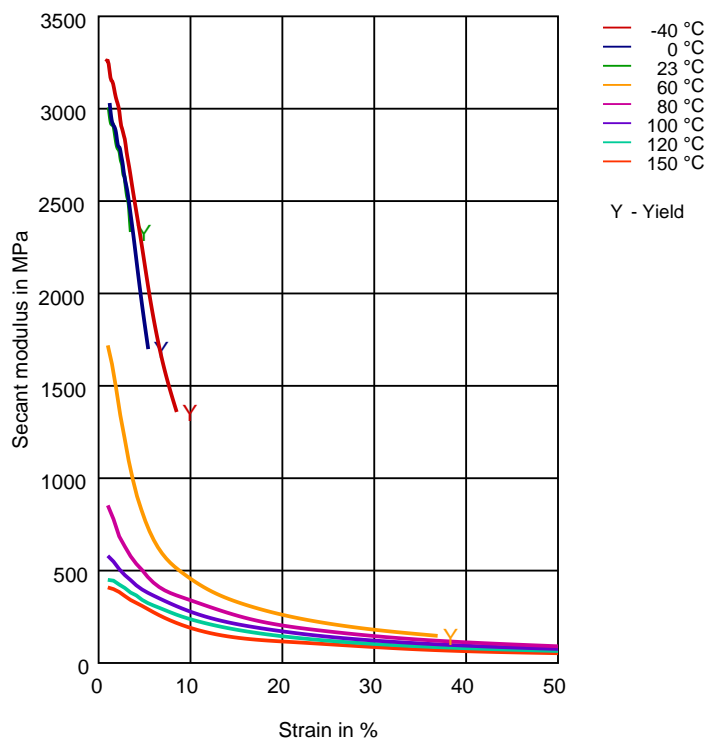

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® FG101F NC010

NYLON RESIN

Secant modulus-strain (cond.)

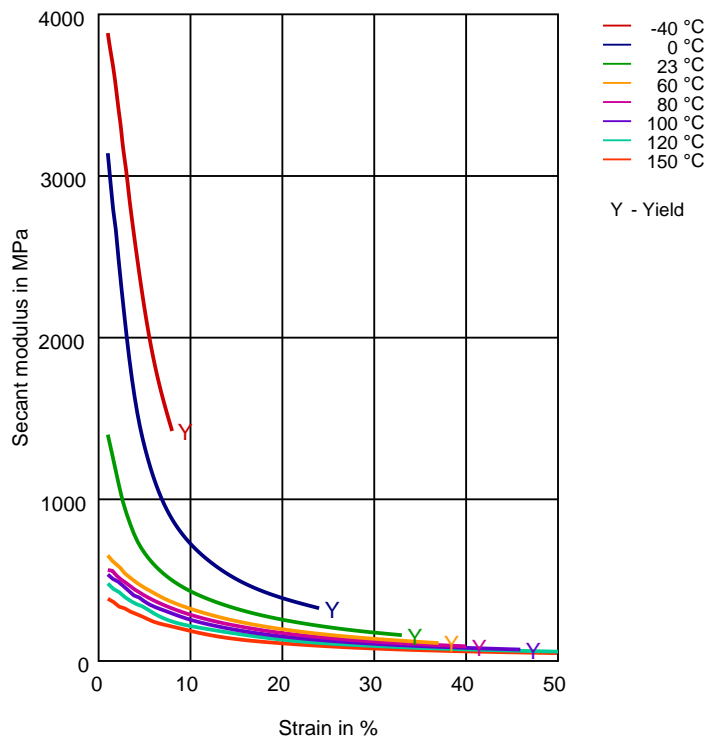

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa



DuPont™ Zytel® FG101F NC010

NYLON RESIN

Chemical Media Resistance

Acids

- ✓ Acetic Acid (5% by mass) (23°C)
- ✓ Citric Acid solution (10% by mass) (23°C)
- ✓ Lactic Acid (10% by mass) (23°C)
- ✗ Hydrochloric Acid (36% by mass) (23°C)
- ✗ Nitric Acid (40% by mass) (23°C)
- ✗ Sulfuric Acid (38% by mass) (23°C)
- ✗ Sulfuric Acid (5% by mass) (23°C)
- ✗ Chromic Acid solution (40% by mass) (23°C)

Bases

- ✗ Sodium Hydroxide solution (35% by mass) (23°C)
- ✓ Sodium Hydroxide solution (1% by mass) (23°C)
- ✓ Ammonium Hydroxide solution (10% by mass) (23°C)

Alcohols

- ✓ Isopropyl alcohol (23°C)
- ✓ Methanol (23°C)
- ✓ Ethanol (23°C)

Hydrocarbons

- ✓ n-Hexane (23°C)
- ✓ Toluene (23°C)
- ✓ iso-Octane (23°C)

Ketones

- ✓ Acetone (23°C)

Ethers

- ✓ Diethyl ether (23°C)

Mineral oils

- ✓ SAE 10W40 multigrade motor oil (23°C)
- ✗ SAE 10W40 multigrade motor oil (130°C)
- ✗ SAE 80/90 hypoid-gear oil (130°C)
- ✓ Insulating Oil (23°C)
- ✗ Motor oil OS206 304 Ref.Eng.Oil, ISP (135°C)
- ✗ Automatic hypoid-gear oil Shell Donax TX (135°C)
- ✗ Hydraulic oil Pentosin CHF 202 (125°C)

Standard Fuels

- ✓ ISO 1817 Liquid 1 - E5 (60°C)
- ✓ ISO 1817 Liquid 2 - M15E4 (60°C)
- ✓ ISO 1817 Liquid 3 - M3E7 (60°C)

Revised: 2018-06-25

Page: 9 of 11

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com

Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Zytel® FG101F NC010

NYLON RESIN

- ✓ ISO 1817 Liquid 4 - M15 (60°C)
- ✓ Standard fuel without alcohol (pref. ISO 1817 Liquid C) (23°C)
- ✓ Standard fuel with alcohol (pref. ISO 1817 Liquid 4) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (23°C)
- ✓ Diesel fuel (pref. ISO 1817 Liquid F) (90°C)
- ✗ Diesel fuel (pref. ISO 1817 Liquid F) (>90°C)

Salt solutions

- ✓ Sodium Chloride solution (10% by mass) (23°C)
- ✗ Sodium Hypochlorite solution (10% by mass) (23°C)
- ✓ Sodium Carbonate solution (20% by mass) (23°C)
- ✓ Sodium Carbonate solution (2% by mass) (23°C)
- ✗ Zinc Chloride solution (50% by mass) (23°C)

Other

- ✓ Ethyl Acetate (23°C)
- ✗ Hydrogen peroxide (23°C)
- ✗ DOT No. 4 Brake fluid (130°C)
- ✗ Ethylene Glycol (50% by mass) in water (108°C)
- ✓ 1% nonylphenoxy-polyethyleneoxy ethanol in water (23°C)
- ✓ 50% Oleic acid + 50% Olive Oil (23°C)
- ✓ Water (23°C)
- ✗ Water (90°C)
- ✗ Phenol solution (5% by mass) (23°C)

Symbols used:

- ✓ possibly resistant

Defined as: Supplier has sufficient indication that contact with chemical can be potentially accepted under the intended use conditions and expected service life. Criteria for assessment have to be indicated (e.g. surface aspect, volume change, property change).

- ✗ not recommended - see explanation

Defined as: Not recommended for general use. However, short-term exposure under certain restricted conditions could be acceptable (e.g. fast cleaning with thorough rinsing, spills, wiping, vapor exposure).

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 160 mil (Hytrel® measured at 80 mil), IEC Electrical properties measured at 80 mil, all ASTM properties measured at 120 mil, and test temperatures are 73°F unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.
EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa



DuPont™ Zytel® FG101F NC010

NYLON RESIN

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa

