

DuPont™ Zytel® FN727 NC010A

NYLON RESIN

Product Information

Common features of Zytel® nylon resin include mechanical and physical properties such as high mechanical strength, excellent balance of stiffness and toughness, good high temperature performance, good electrical and flammability properties, good abrasion and chemical resistance. In addition, Zytel® nylon resins are available in different modified and reinforced grades to create a wide range of products with tailored properties for specific processes and end-uses. Zytel® nylon resin, including most flame retardant grades, offer the ability to be coloured.

The good melt stability of Zytel® nylon resin normally enables the recycling of properly handled production waste. If recycling is not possible, DuPont recommends, as the preferred option, incineration with energy recovery (-31kJ/g of base polymer) in appropriately equipped installations. For disposal, local regulations have to be observed.

Zytel® nylon resin typically is used in demanding applications in the automotive, furniture, domestic appliances, sporting goods and construction industry.

Zytel® FN727 NC010A is an impact modified, plasticizer free, very flexible polyamide 6 alloy resin having good low temperature toughness, good heat aging and good chemical resistance. Uses include cable jacketing, hose and tube applications.

General information	Value	Unit	Test Standard
Resin Identification	PA6-F	-	ISO 1043
Part Marking Code	PA6-F	-	ISO 11469
Rheological properties	dry / cond	Unit	Test Standard
Molding shrinkage, parallel	0.8 / -	%	ISO 294-4, 2577
Molding shrinkage, normal	1.2 / -	%	ISO 294-4, 2577
Mechanical properties	dry / cond	Unit	Test Standard
Tensile Modulus	900 / 330	MPa	ISO 527-1/-2
Stress at 50% strain	28 / 16	MPa	ISO 527-1/-2
Strain at break	>50 / >50	%	ISO 527-1/-2
Flexural Modulus	900 / -	MPa	ISO 178
Charpy notched impact strength			ISO 179/1eA
73 °F	130 / -	kJ/m ²	
-22 °F	65 / -	kJ/m ²	
Izod notched impact strength, 73 °F	N / -	kJ/m ²	ISO 180/1A
Thermal properties	dry / cond	Unit	Test Standard
Melting temperature, 18 °F/min	221 / *	°C	ISO 11357-1/-3
Glass transition temperature, 18 °F/min	55 / 10	°C	ISO 11357-1/-2
Temp. of deflection under load			ISO 75-1/-2
260 psi	48 / *	°C	
65 psi	55 / *	°C	
Thermal conductivity of melt	0.16	W/(m K)	-
Spec. heat capacity of melt	2700	J/(kg K)	-
Flammability	Value	Unit	Test Standard
FMVSS Class	B	-	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	<100	mm/min	ISO 3795 (FMVSS 302)
Other properties	dry / cond	Unit	Test Standard
Humidity absorption, 80mil	1.4 / *	%	Sim. to ISO 62
Density	1020 / -	kg/m ³	ISO 1183
Density of melt	870	kg/m ³	-
Injection	Value	Unit	Test Standard
Drying Recommended	yes	-	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.1	%	-
Melt Temperature Optimum	260	°C	-
Min. melt temperature	250	°C	-
Max. melt temperature	280	°C	-
Min. mold temperature	40	°C	-
Max. mold temperature	80	°C	-

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com



DuPont™ Zytel® FN727 NC010A

NYLON RESIN

Characteristics

Processing	<ul style="list-style-type: none">• Injection Molding• Film Extrusion• Profile Extrusion	<ul style="list-style-type: none">• Sheet Extrusion• Other Extrusion• Coating	<ul style="list-style-type: none">• Blow Molding
Delivery form	<ul style="list-style-type: none">• Pellets		
Regional Availability	<ul style="list-style-type: none">• North America• Europe	<ul style="list-style-type: none">• Asia Pacific• South and Central America	<ul style="list-style-type: none">• Near East/Africa• Global

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa




DuPont™ Zytel® FN727 NC010A


NYLON RESIN

Diagrams

Viscosity-shear rate

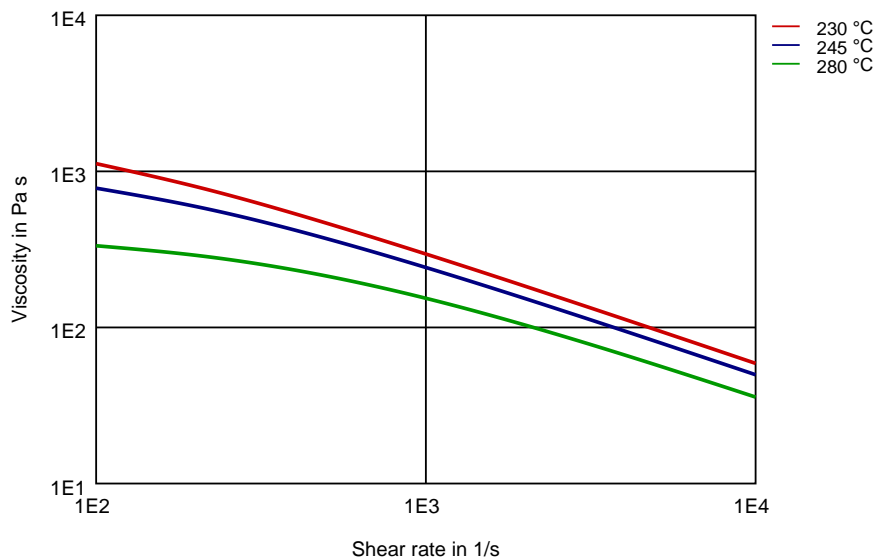


Shearstress-shear rate

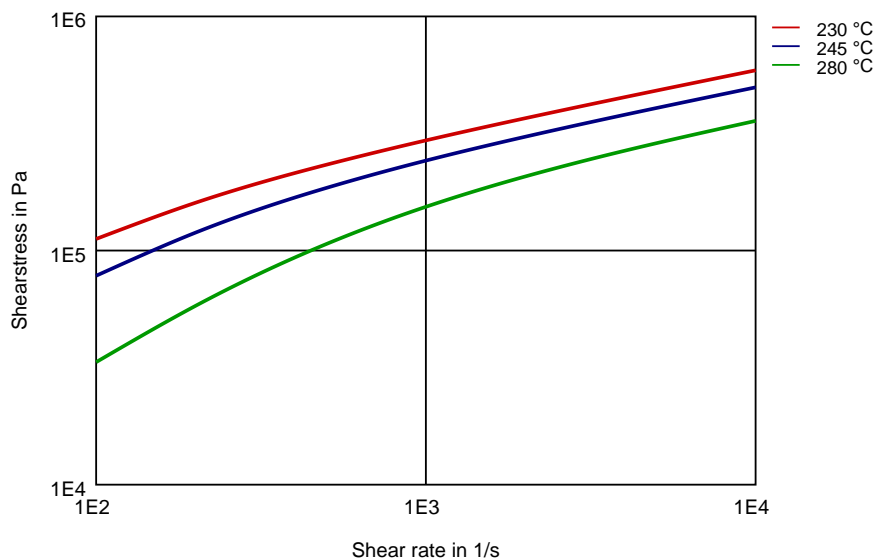


DuPont™ Zytel® FN727 NC010A

NYLON RESIN

Dynamic Shear modulus-temperature (dry)

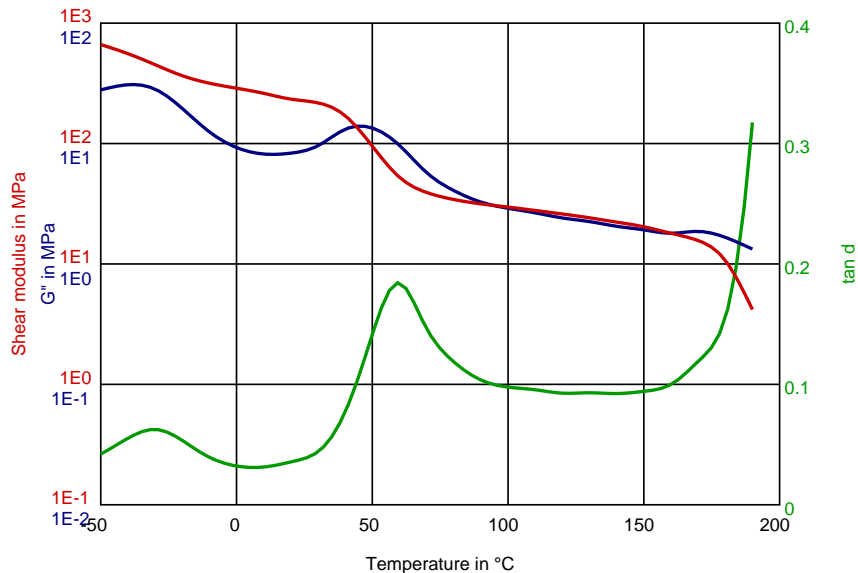

Dynamic Tensile modulus-temperature (dry)

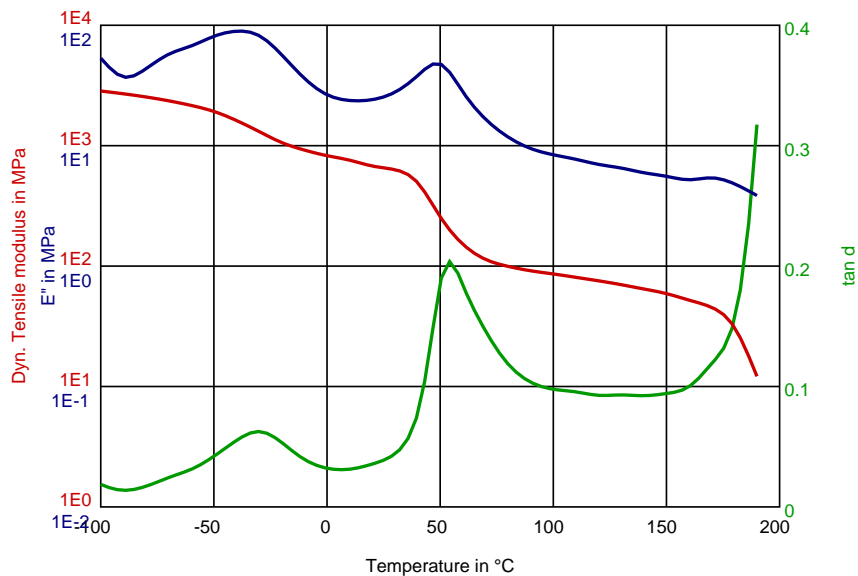

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa




DuPont™ Zytel® FN727 NC010A

NYLON RESIN

Dynamic Tensile modulus-temperature (cond.)

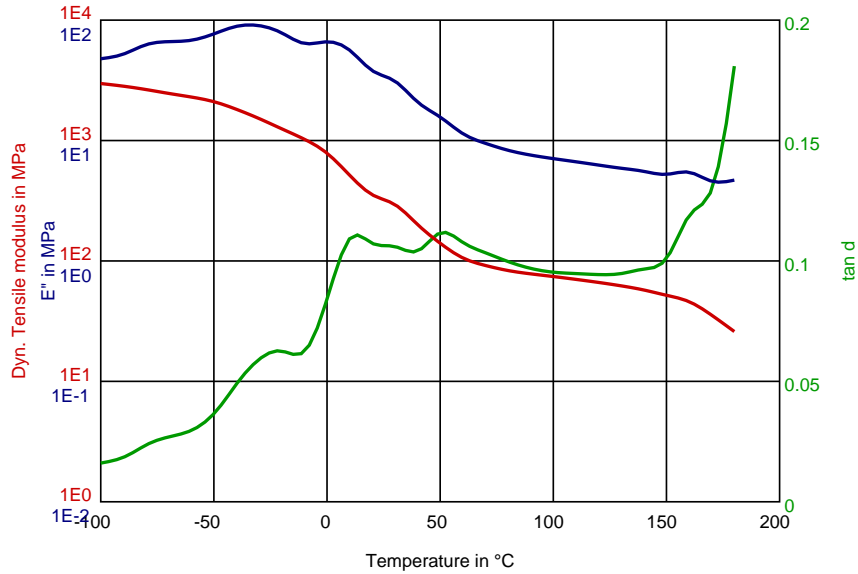

Specific volume-temperature (pvT)

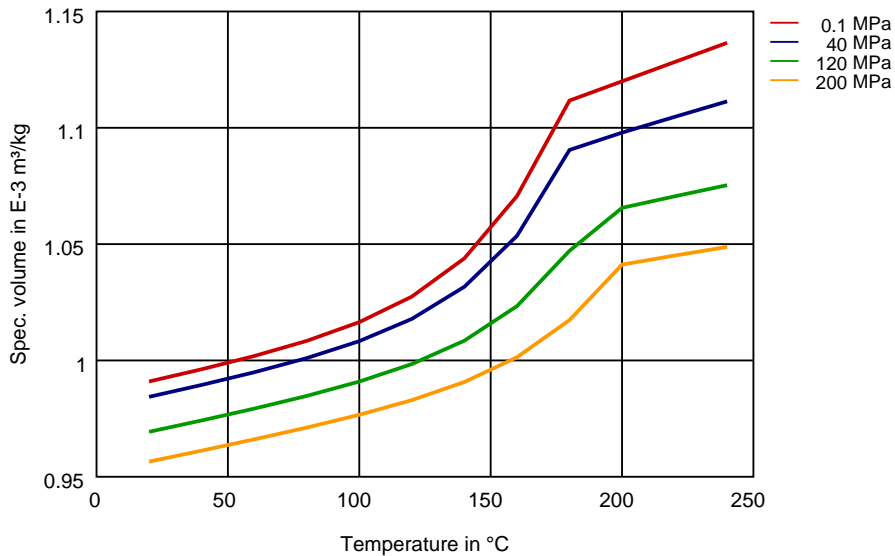

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 160 mil (Hytrel® measured at 80 mil), IEC Electrical properties measured at 80 mil, all ASTM properties measured at 120 mil, and test temperatures are 73°F unless otherwise stated.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa



DuPont™ Zytel® FN727 NC010A

NYLON RESIN

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa

