


DuPont™ Zytel® RS 3261TL NC010


NYLON RESIN

Diagrams

Dynamic Tensile modulus-temperature (dry)

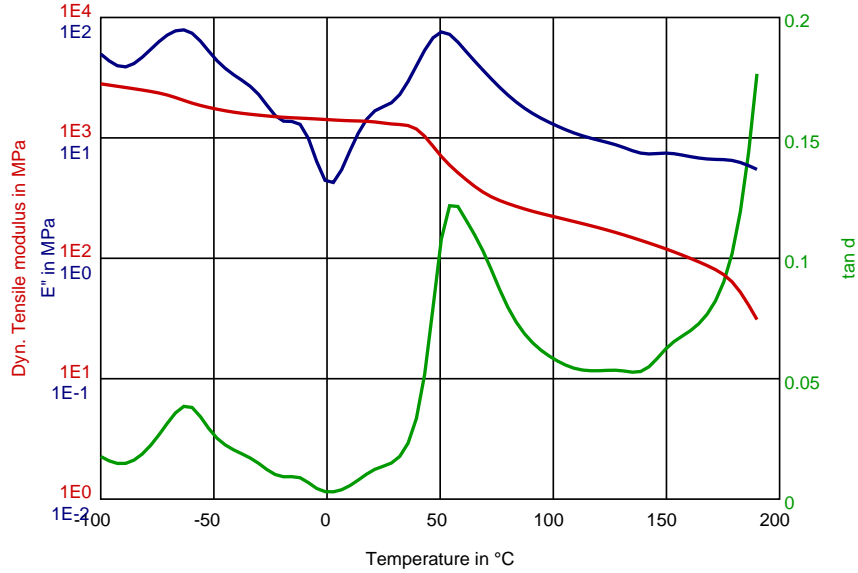

Dynamic Tensile modulus-temperature (cond.)

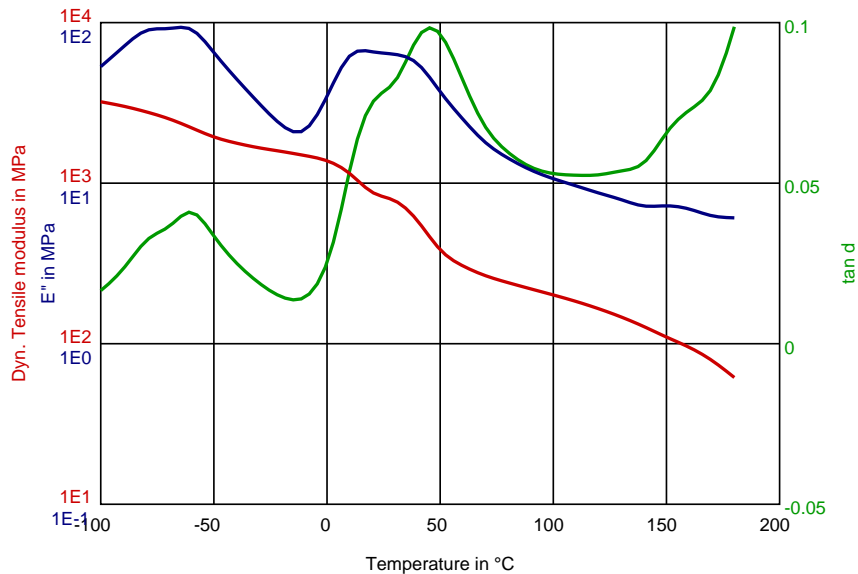

Revised: 2018-08-09

Page: 2 of 8

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com


Copyright 2017 DuPont. The DuPont Oval Logo is a trademark or registered trademark of E.I. du Pont de Nemours and Company or its affiliates. All rights reserved.



DuPont™ Zytel® RS 3261TL NC010

NYLON RESIN

Stress-strain (dry)

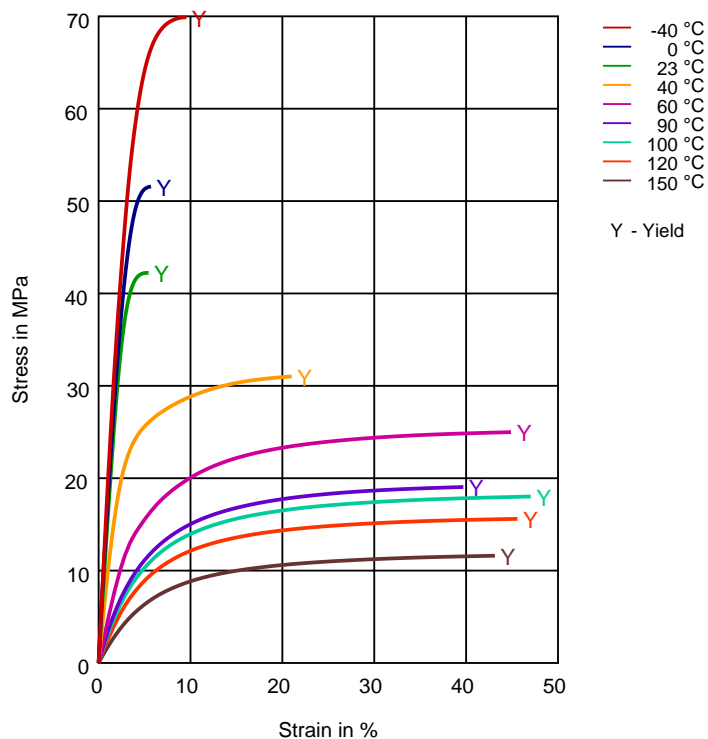

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® RS 3261TL NC010

NYLON RESIN

Stress-strain (cond.)

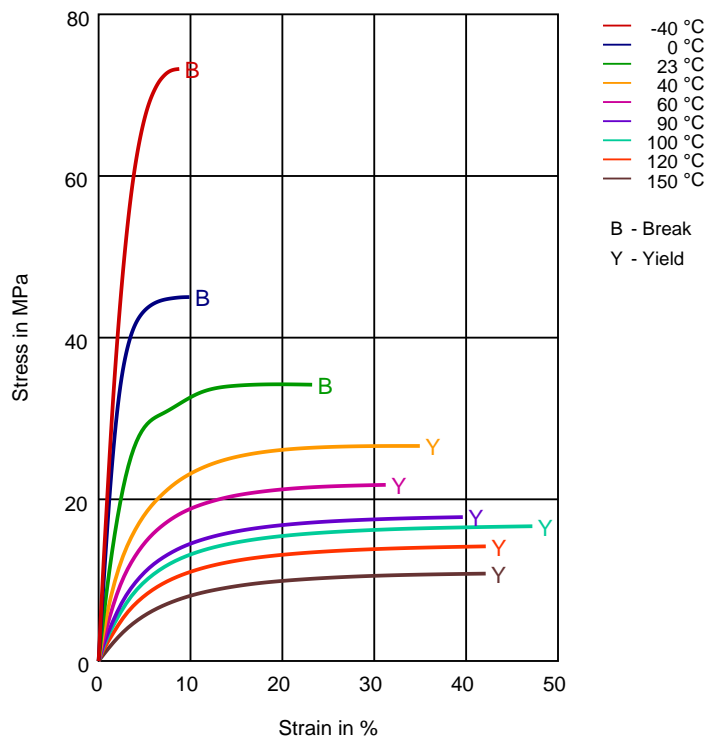

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® RS 3261TL NC010

NYLON RESIN

Secant modulus-strain (dry)

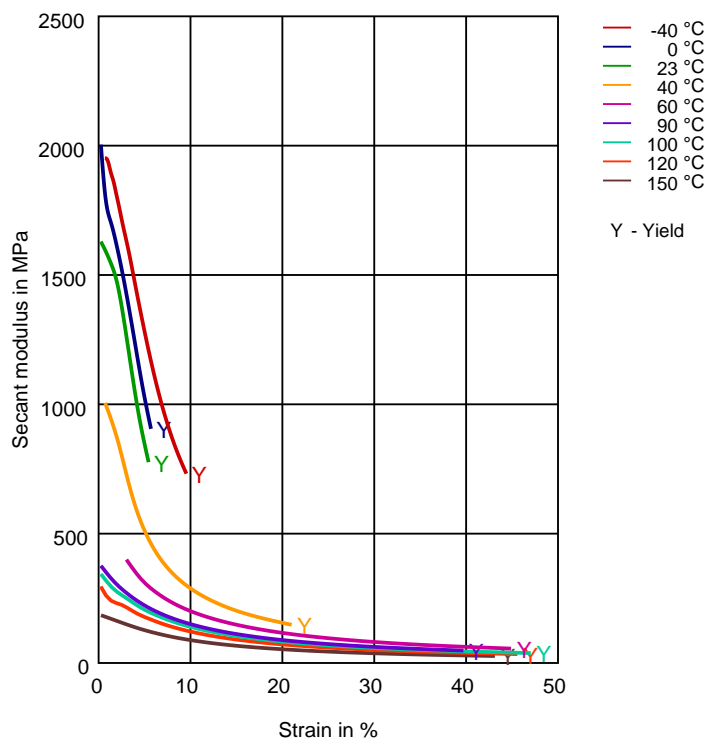

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999


Europe/Middle East/Africa



DuPont™ Zytel® RS 3261TL NC010

NYLON RESIN


Secant modulus-strain (cond.)

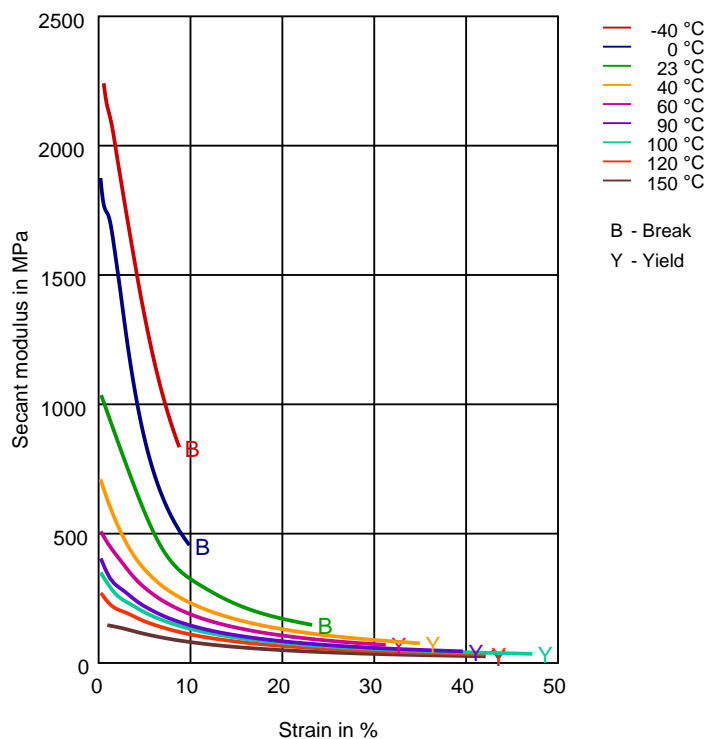


DuPont™ Zytel® RS 3261TL NC010

NYLON RESIN

Tensile modulus-temperature (dry)

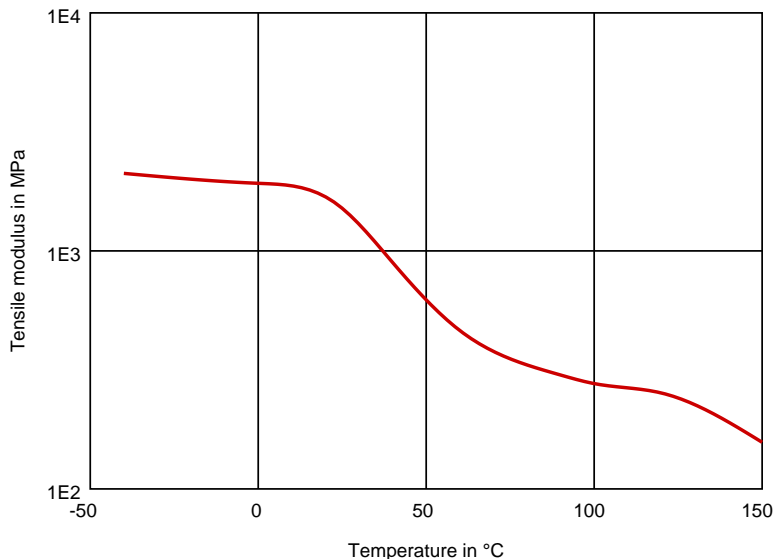

Tensile modulus-temperature (cond.)

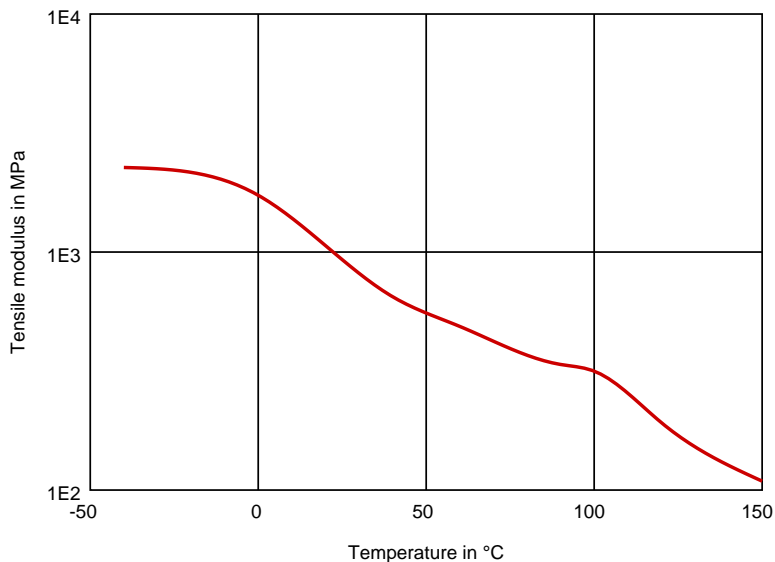

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 160 mil (Hytrel® measured at 80 mil), IEC Electrical properties measured at 80 mil, all ASTM properties measured at 120 mil, and test temperatures are 73°F unless otherwise stated.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com



DuPont™ Zytel® RS 3261TL NC010

NYLON RESIN

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa

