

DuPont™ Delrin® FG400MTD BLA079

ACETAL RESIN

Product Information

Common features of Delrin® acetal resins include mechanical and physical properties such as high mechanical strength and rigidity, excellent fatigue and impact resistance, as well as resistance to moisture, gasoline, lubricants, solvents, and many other neutral chemicals. Delrin® acetal resins also have excellent dimensional stability and good electrical insulating characteristics. They are naturally resilient, self-lubricating, and available in a variety of colors and speciality grades.

Delrin® acetal resin typically is used in demanding applications in the automotive, domestic appliances, sports, industrial engineering, electronics, and consumer goods industries.

Delrin® FG400MTD is a metal-filled, medium viscosity acetal copolymer for injection molding. It is detected in metal detectors. It has been developed for applications in contact with food.

FOOD CONTACT

This product is manufactured according to Good Manufacturing Practice (GMP) principles and generally accepted in food contact applications in Europe and the USA when meeting applicable use conditions. For details, individual compliance statements are available from your DuPont representative.

General information	Value	Unit	Test Standard
Resin Identification	POM-MED(Fe)	-	ISO 1043
Part Marking Code	POM-MED(Fe)	-	ISO 11469
Rheological properties	Value	Unit	Test Standard
Melt mass-flow rate	17	g/10min	ISO 1133
Melt mass-flow rate, Temperature	190	°C	ISO 1133
Melt mass-flow rate, Load	2.16	kg	ISO 1133
Molding shrinkage, parallel	1.7	%	ISO 294-4, 2577
Molding shrinkage, normal	1.6	%	ISO 294-4, 2577
Mechanical properties	Value	Unit	Test Standard
Tensile Modulus	2800	MPa	ISO 527-1/-2
Yield stress	61	MPa	ISO 527-1/-2
Yield strain	8	%	ISO 527-1/-2
Nominal strain at break	15	%	ISO 527-1/-2
Flexural Modulus	2700	MPa	ISO 178
Charpy impact strength, 73°F	70	kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 73°F	3	kJ/m ²	ISO 179/1eA
Thermal properties	Value	Unit	Test Standard
Melting temperature, 18°F/min	168	°C	ISO 11357-1/-3
Temp. of deflection under load, 260 psi	100	°C	ISO 75-1/-2
Coeff. of linear therm. expansion, parallel	120	E-6/K	ISO 11359-1/-2
Coeff. of linear therm. expansion, normal	120	E-6/K	ISO 11359-1/-2
Flammability	Value	Unit	Test Standard
FMVSS Class	B	-	ISO 3795 (FMVSS 302)
Burning rate, Thickness 1 mm	<100	mm/min	ISO 3795 (FMVSS 302)
Other properties	Value	Unit	Test Standard
Density	1530	kg/m ³	ISO 1183
Injection	Value	Unit	Test Standard
Drying Recommended	yes	-	-
Drying Temperature	≥80	°C	-
Drying Time, Dehumidified Dryer	2 - 4	h	-
Processing Moisture Content	≤0.2	%	-
Melt Temperature Optimum	205	°C	-
Min. melt temperature	200	°C	-
Max. melt temperature	210	°C	-
Mold Temperature Optimum	90	°C	-
Min. mold temperature	80	°C	-
Max. mold temperature	100	°C	-
Hold pressure range	80 - 100	MPa	-
Hold pressure time	8	s/mm	-

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

Asia Pacific

Europe/Middle East/Africa

DONGGUAN FUMEI PLASTICS CO.,LTD.

TEL: +86 0769-82339888 / 87798999

EMAIL: fumei@foomx.com



DuPont™ Delrin® FG400MTD BLA079

ACETAL RESIN

Characteristics

Processing	• Injection Molding		
Delivery form	• Pellets		
Additives	• Release agent		
Regional Availability	• North America • Europe	• Asia Pacific • South and Central America	• Near East/Africa • Global

Processing Texts

Injection molding

Drying is recommended, but not necessary for newly opened packaging stored in a dry location.

Follow the drying guidelines above in the following cases:

- If moisture is above the Processing Moisture Content recommendation,
- When a resin container is damaged,
- When the material is not properly stored in a dry place at room temperature, or
- When packaging stays open for a significant time.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa




DuPont™ Delrin® FG400MTD BLA079


ACETAL RESIN

Diagrams

Viscosity-shear rate

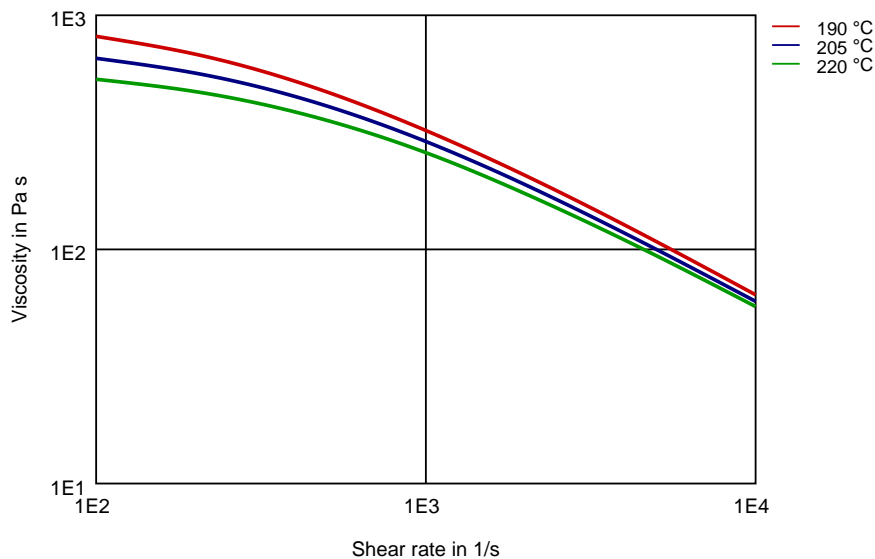


Shearstress-shear rate

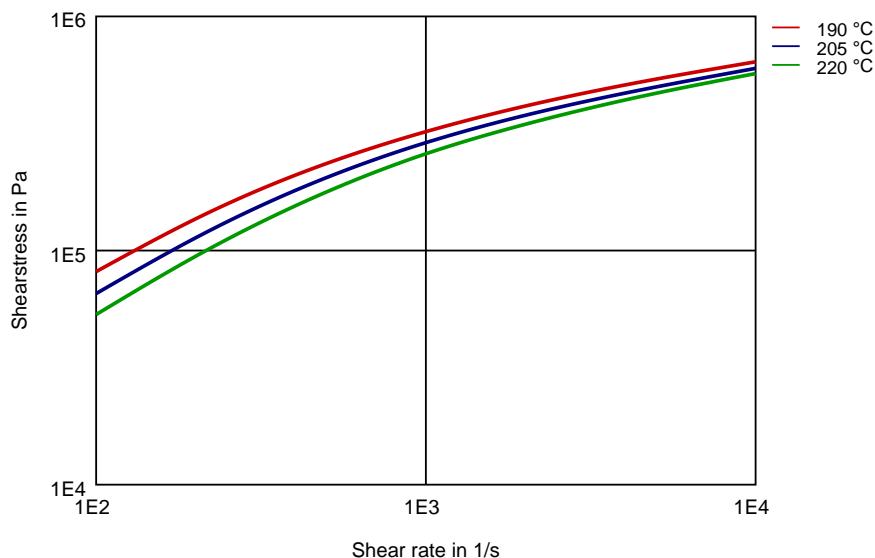

DuPont™ Delrin® FG400MTD BLA079

ACETAL RESIN

Specific volume-temperature (pvT)

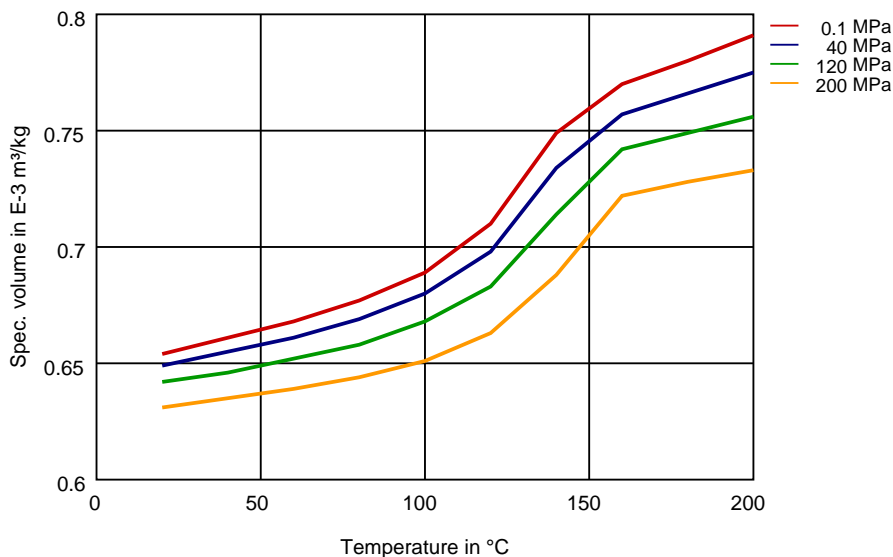

Contact DuPont for Material Safety Data Sheet, general guides and/or additional information about ventilation, handling, purging, drying, etc. ISO Mechanical properties measured at 160 mil (Hytrel® measured at 80 mil), IEC Electrical properties measured at 80 mil, all ASTM properties measured at 120 mil, and test temperatures are 73°F unless otherwise stated.

The information set forth herein is furnished free of charge and is based on technical data that DuPont believes to be reliable and falls within the normal range of properties. It is intended for use by persons having technical skill, at their own discretion and risk. This data should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents. Caution: Do not use in medical applications involving permanent implantation in the human body. For other medical applications, discuss with your DuPont customer representative and read Medical Caution H-50103-5.

Copyright © 2017 DuPont or its affiliates. All Rights Reserved. The DuPont Oval Logo, DuPont™, The miracles of science™ and all products denoted with ® or ™ are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates.

To find out more, visit [DuPont Performance Polymers](#) or contact nearest DuPont location.

North America

DONGGUAN FUMEI PLASTICS CO.,LTD.

EMAIL: fumei@foomx.com

Asia Pacific

TEL: +86 0769-82339888 / 87798999

Europe/Middle East/Africa

